




A Furukawa Company

AccuRiser™ Indoor/Outdoor Ribbon Cable

High-Density Cable Improves Installation Speed for Backbone Data Center and Central Office Deployments

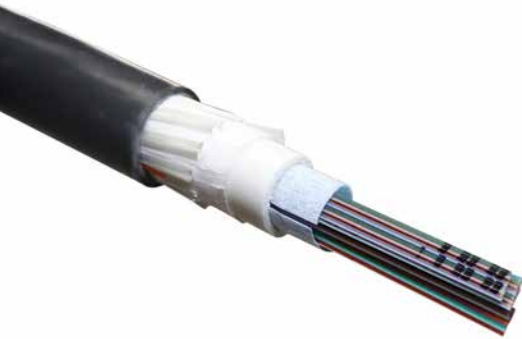

AccuRiser Indoor/Outdoor Ribbon Cable

Features

- Flexible Jacket Design
- Indoor/Outdoor Rated
- Low Smoke/Zero Halogen (LSZH) materials
- Dual Flame Rating (OFNR and IEC-60332-3C)
- Complies with ICEA-S-696 Standard
- Fiber counts of 288-864 with 24 optical fibers per ribbon

Benefits

- Offers ease of routing within Data Centers or Central Office ladder racking
- Dual fire rating promotes global use and reduces regional code selection issues
- High fiber count ribbon backbone cable helps to speed installation time when compared with single-fiber cables
- High-fiber density helps save on valuable space


Product Description

The AccuRiser Indoor/Outdoor Ribbon Cable was specifically designed to offer high-fiber density and speed of deployment in the backbone of Data Center and Central Office networks. This cable features a highly crush-resistant, central core design that remains flexible to allow smooth installation during routing. A central core tube and water-blocking tapes surround the ribbon fiber stacks for excellent water-penetration resistance. Dielectric strength members provide added tensile and crush resistance, while a low smoke/zero halogen (LSZH) outer jacket completes the cable construction.

Why the AccuRiser Indoor/Outdoor Cable?

Every element of the AccuRiser Cable is designed to help facilitate speed of installation during a new data center or central office deployment. The 24-fiber ribbons allow splice-in-place operations that help to get a facility up and running rapidly. This strong yet flexible cable helps to ease cable installation over ladder racking and through tight bends during routing as well as smoothing and speeding installation times. A broad range of AccuRiser Cable fiber counts helps engineering to select the right cable for the job.

The AccuRiser Indoor/Outdoor Cable is an excellent choice for building-to-building cable connections. This cable also removes the need for intermediate splice points for transitions from the outdoor environment to indoor use. Reducing the number of splices can result in improved system loss and lower termination points within a network.

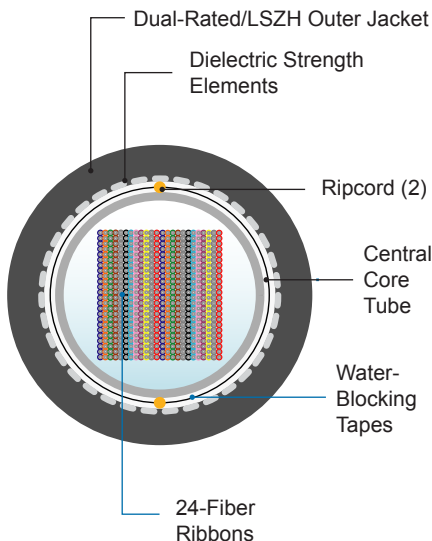



A Furukawa Company

Specifications

Fiber Count:	288	576	864
Outer Diameter - in. (mm)	0.86 (17.0)	0.77 (19.5)	0.96 (24.5)
Weight - lb/kft (kgm/km)	171 (259)	223 (332)	326 (486)
Maximum Tensile lb (N)	600 (2670)	600 (2670)	600 (2670)

Performance Standard

The AccuRiser Indoor/Outdoor Cable meets all or portions of Telcordia GR-409/ICEA-S-83-696/ICEA-S-104-696/ICEA-S-115-730 and TIA-568. Riser-rated cables are UL® listed as compliant with NEC® Article 770 as Type OFNR. Non-halogen cables are compliant with the requirements of IEC 60332-3C and IEC 61034-2.

Handling

Temperature

Installation: -4 °F to 140 °F (-20 °C to 60 °C)
Operation: -40 °F to 158 °F (-40 °C to 70 °C)
Storage: -40 °F to 158 °F (-40 °C to 70 °C)

Fiber Type²

Code	Single-Mode Descriptor	Grade	1310 nm	1550 nm	MCA (Z)
W	AllWave® FLEX+ ZWP Bend-Optimized Single-Mode Fiber	G.657.A2	0.4 dB/km	0.3 dB/km	4
7	AllWave® FLEX+ Enhanced Bend-Optimized Single-Mode Fiber	G.657.A2	0.4 dB/km	0.3 dB/km	4
D	EZ-Bend® Ultra Bend-Insensitive Single-Mode Fiber	G.657.B3	0.4 dB/km	0.3 dB/km	4
Multimode Descriptor			850 nm	1300 nm	MCA (Z)
K	LaserWave® FLEX G+ Multimode Fiber	OM2	3.5 dB/km	1.5 dB/km	G
3	LaserWave FLEX 300 Multimode Fiber	OM3	3.5 dB/km	1.5 dB/km	G
5	LaserWave FLEX 550 Multimode Fiber	OM4	3.5 dB/km	1.5 dB/km	G

AccuRiser Indoor/Outdoor Ribbon Cable Ordering Information

Example: 8FIO-288A-WDK-4¹

Part Number: 8FIO - NNN A - W X Y - Z

8FIO = AccuRiser Indoor/Outdoor Cable
NNN = Fiber Count = 288, 576 or 864
A = Initial Release Version
W = Fiber Type (see chart above)
X = Jacket Material (flame retardant)
D = Dual-Rated Low Smoke/Zero Halogen (UL 1666 & IEC 60332-3C)
Y = Jacket Color²
K = Black
Y = Yellow
A = Aqua
T = Black with two yellow stripes
Z = Maximum Cable Attenuation (MCA) (see chart above)

¹ Part Number shown is for an AccuRiser Dual-Rated Indoor/Outdoor Cable with 288 AllWave FLEX+ ZWP Fibers and standard cable print. OFS G.657.A1 I/O OPTICAL CABLE -C- 8FIO-288A-WDK-4 OFNG-ST1 FT4 c (UL) OFNR-LS IEC 60332-3-24 LSZH [MM/YY] [LOT NO] [LENGTH IN FEET]

² Contact OFS Order Management for information on other cable variations including additional fiber types, fiber counts, attenuation and custom cable print.

For additional information please contact your sales representative.

You can also visit our website at www.ofsoptics.com or call 1-888-fiberhelp (1-888-342-3743) USA or 1-770-798-5555 outside the USA.



Copyright © 2016 OFS Fitel, LLC. All rights reserved, printed in USA.

OFS Marketing Communications Doc ID: prem-234 Date: 06/16



AllWave and EZ-Bend are registered trademarks and AccuRiser is a trademark of OFS FITEL, LLC. OFS reserves the right to make changes to the prices and product(s) described in this document at any time without notice. This document is for informational purposes only and is not intended to modify or supplement any OFS warranties or specifications relating to any of its products or services.