




A Furukawa Company

AllWave[®] One Fiber - Zero Water Peak

Full Spectrum, Bend Optimized, Low Loss, One Fiber

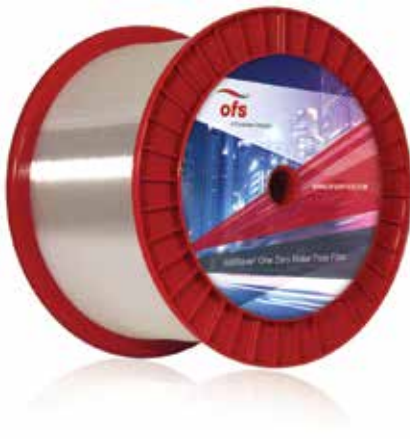

Applications

AllWave One Fiber provides outstanding cable performance for the entire optical network including:

- FTTX
- Local access
- Mobile backhaul
- Metro access
- Metro edge
- Campus backbones
- Long haul

Features and Benefits

- Full spectrum, low-loss, bend optimized fiber
- Very low loss across the 1260 nm – 1625 nm wavelength spectrum for longer reach and improved reliability
- Industry's tightest geometric control for ultra-low splice loss and improved connector performance
- High purity silica for long-term attenuation stability and mechanical reliability
- Ultra-low PMD for speed and distance upgrades

Overview

AllWave One Zero Water Peak (ZWP) Single-Mode Optical Fiber combines three benefits in one fiber to help improve network performance over conventional single-mode fibers. This fiber goes beyond award-winning AllWave Fiber with a 15% lower loss specification at 1550 nm, a 40% smaller minimum bend radius, a 67% lower bend loss and a 33% improved Polarization Mode Dispersion (PMD) link design value.

Product Description

AllWave One Fiber performs reliably in demanding networks with specifications superior to both ITU-T G.652.D and G.657.A1. With an attenuation ≤ 0.33 dB/km at 1310 nm and 0.18 dB/km at 1550 nm, this fiber provides extra margin and/or extended reach for demanding applications.

AllWave One Fiber bends to the needs of challenging Outside Plant (OSP) networks. With a minimum bend radius of 10 mm and 80% lower bend loss than conventional G.652.D fiber, this fiber helps to increase the reliability and reach of applications in the bend-sensitive 1460 nm – 1625 nm bands. AllWave One Fiber has the same 9.2 μ m mode field diameter and is completely backward compatible with the installed base of conventional single-mode fibers for seamless splicing and faster testing.

For additional information please contact your sales representative.

You can also visit our website at www.ofsoptics.com or call 1-888-fiberhelp (1-888-342-3743) USA or 1-770-798-5555 outside the USA.

North America
Telephone: 508-347-8590
Toll Free: 800-799-7732
Fax: 508-347-1211
E-mail: fibersalesnar@ofsoptics.com

Asia Pacific
Telephone: +852 2506 5054
Fax: +852 2506 0166
E-mail: fibersalesap@ofsoptics.com

Caribbean, Latin America
Telephone: +1-508-347-8590
Fax: +1-508-347-1211
E-mail: fibersalescala@ofsoptics.com

Japan
Telephone: +81-3-3286-3424
Fax: +81-3-3286-3708 or 3190
E-mail: fibersalesjapan@ofsoptics.com

Europe, Middle East, Africa
Telephone: +45-43 48 3736
Fax: +45 4348 3444
E-mail: ofssalesdk@ofsoptics.com

China
Telephone: +86 10 6505 3660
Fax: +86 10 65059515
E-mail: fibersaleschina@ofsoptics.com



Copyright © 2016 OFS Fitel, LLC.
All rights reserved, printed in USA.

OFS Marketing Communications
Doc ID: fiber-160 Date: 04/16

AllWave is a registered trademark of OFS Fitel, LLC.

OFS reserves the right to make changes to the prices and product(s) described in this document at any time without notice. This document is for informational purposes only and is not intended to modify or supplement any OFS warranties or specifications relating to any of its products or services.

Product Specifications

Physical Characteristics		
Clad Diameter	125.0 ± 0.7 μm	
Clad Non-Circularity	≤ 0.7 %	
Core/Clad Concentricity Error (Offset)	≤ 0.5 μm, < 0.2 μm typically	
Coating Diameter (Uncolored)	237 - 247 μm	
Coating-Clad Concentricity Error (Offset)	≤ 12 μm	
Tensile Proof Test	100 kpsi (0.69 GPa)	
Coating Strip Force	Range: 1.0 N ≤ CSF ≤ 8.9 N	
Standard Reel Lengths	50.4 km (31.3 miles)	
Optical Characteristics		
Attenuation	Maximum	
at 1310 nm	≤ 0.33 dB/km	
at 1385 nm	≤ 0.31 dB/km	
at 1490 nm	≤ 0.21 dB/km	
at 1550 nm	≤ 0.18 dB/km	
at 1625 nm	≤ 0.20 dB/km	
Attenuation vs. Wavelength ¹	Reference (nm) λ	α
Range (nm)	1310	0.03
1285 – 1330	1385	0.04
1360 – 1480	1550	0.02
1525 – 1575	1550	0.04
1460 – 1625		
¹ The attenuation in a given wavelength range does not exceed the attenuation of the reference wavelength (λ) by more than the value α.		
Attenuation Uniformity / Point Discontinuities at 1310 nm and 1550 nm	≤ 0.05 dB	
Macrobending Attenuation:		
The maximum attenuation with bending does not exceed the specified values under the following deployment conditions:		
Deployment Condition	Wavelength	Induced Attenuation
1 turn on a 10 mm radius mandrel	1550 nm	≤ 0.50 dB
	1625 nm	≤ 1.0 dB
10 turns on a 15 mm radius mandrel	1550 nm	≤ 0.05 dB
	1625 nm	≤ 0.30 dB
100 turns on 25 & 30 mm radius mandrels	1550 nm	≤ 0.03 dB
	1625 nm	≤ 0.01 dB
Chromatic Dispersion		
Zero Dispersion Wavelength (λ ₀)	1302 - 1322 nm	
Zero Dispersion Slope (S ₀)	≤ 0.090 ps/nm ² -km	
Typical Dispersion Slope	0.087 ps/nm ² -km	
Cut-off Wavelength (λ _{cc})	≤ 1260 nm	
Group Refractive Index		
at 1310 nm	1.467	
at 1550 nm	1.468	
Mode Field Diameter		
at 1310 nm	9.2 ± 0.4 μm	
at 1550 nm	10.4 ± 0.5 μm (typical)	
Polarization Mode Dispersion (PMD) ³		
Fiber PMD Link Design Value (LDV) ⁴	≤ 0.04 ps/√km	
Maximum Individual Fiber	≤ 0.1 ps/√km	
Typical Fiber LMC PMD	≤ 0.02 ps/√km	
² As measured with low mode coupling (LMC) technique in fiber form, value may change when cabled. Check with your cable manufacturer for specific PMD limits in cable form.		
³ The PMD Link Design Value complies with IEC 60794-3, September 2001 (N = 20, Q = 0.01%). Details are described in IEC 61282-3 TR Ed 2, October 2006.		
Environmental Characteristics (at 1310, 1550 & 1625 nm)		
Temperature Cycling (-60 + 85 °C)	≤ 0.05 dB/km	
High Temperature Aging (85 ± 2 °C)	≤ 0.05 dB/km	
Temperature & Humidity Cycling (at -10 °C to +85 °C and 85 to ~98% RH)	≤ 0.05 dB/km	
Water Immersion (23 ± 2 °C)	≤ 0.05 dB/km	
Dynamic Fatigue Stress Corrosion Parameter	(n _g) ≥ 20	