




A Furukawa Company

M-Pack® Interconnect Multi-Fiber Cordage

Compact Cordage Offers Increased Energy Efficiency and Cost-Saving Opportunities

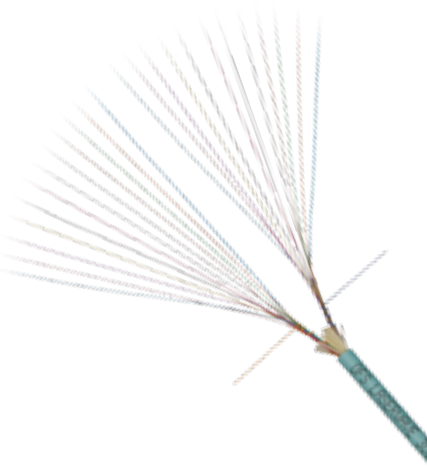

Features and Benefits

- Small diameter, lightweight cordage allows ease of deployment and termination
- Ideal for use in high-density, high-bandwidth applications and optimized for use with multi-fiber connectors
- RoHS compliant and environmentally friendly; free of heavy metals and polybrominated fire retardants
- Available in fiber counts from 2 to 48 (Plenum-Rated) and 2 to 12 (LSZH-Rated); also offered in an Indoor/Outdoor Simplex LSZH design. Ask for details.
- Plenum cordage meets requirements of NFPA 262 OFNP flame and smoke performance; LSZH cordage meets IEC 60332-3C standards
- Available with OFS' industry-leading LaserWave® Multimode Fibers and other fibers

Product Description

When you need a compact cordage solution for data centers or other high-density, high-bandwidth applications, look to the OFS M-Pack® Interconnect Cordage. Designed for use with multifiber connectors, this cordage helps save on energy costs and valuable space while offering outstanding performance.

The M-Pack Cordage Plenum-Rated Cordage features 2 to 48 color-coded 250 μm optical fibers. The Low Smoke/Zero Halogen Cordage features 2 to 24 fibers. For 2- to 12-fiber cordages, the individual fibers are identified by easily-distinguishable TIA-598 compliant colors. In cordages with fiber counts of 16 to 48, the fibers are held loosely together by polyester threads for bundle identification¹. The fibers are surrounded by aramid yarn for reinforcement and then covered with a flame-retardant outer jacket to complete the construction.

Now available in 2.0 mm or 3.0 mm diameters!

Plenum Rated Specifications

Fiber Count	2	4	6	8	12	4	6	8	12	16	24	32	36	48	
Cable Outer Diameter - mm. (in.)	2.0 (0.08)					3.0 (0.12)					3.8 (0.15)		4.5 (0.18)		4.8 (0.19)
Cable Weight - lb/kft (kg/km)	2.4 (3.6)	2.6 (3.9)	2.8 (4.1)	3.0 (4.4)	3.3 (4.9)	5.5 (8.2)	5.6 (8.4)	5.8 (8.7)	6.2 (9.2)	8.5 (12.6)	9.2 (13.7)	11.6 (17.2)	13.1 (20.1)	13.7 (20.4)	
Flame Rating	OFNP					OFNP									
Version	C	C	C	C	C	B	B	B	B	B	B	B	A	A	
Fiber Bundles											2x8 Colors	2x12 Colors	4x8 Colors	3x12 Colors, 1xFillers	4x12 Colors

NOTE: Fiber bundles are bound by colored thread: blue, orange, green, brown


Riser Rated and LSZH Specifications

	MP20-R*		MP20-H		MP30-H					
Fiber Count	2-12		2-12		2	4	6	8	12	24
Cable Outer Diameter - mm. (in.)	2.0 (0.08)		2.0 (0.08)		3.0 (0.12)				3.8 (0.15)	
Cable Weight - lb/kft (kg/km)	2.4 (3.6) - 3.3 (4.9)		2.6 (3.9) - 3.5 (5.2)		4.7 (7.0)	4.8 (7.1)	4.9 (7.2)	5.0 (7.4)	5.1 (7.6)	11.8 (7.9)
Flame Rating	OFNR		LSZH 60332-3C		LSZH 60332-3C					
Version	A		A		A	A	A	A	A	A
CPR Rating	Dca-s2, d0, a3		Dca-s1, d0, a1		Dca-s1, d0, a1					
DoP Lookup: www.ofs-sales.com/cpr/	MP20-R-XXX or MPH-W-R-XXX (XXX = Fiber Count)		MP20-H-XXX		MP30-H-XXX					

* **NOTE:** MPH-W is an FTTx Version of MP20 OFNR.

¹ The fiber bundles consist of two groups of 8 fibers for the 16-fiber cordage; two groups of 12 fibers for the 24-fiber cordage; four groups of 8 fibers for the 32-fiber cordage; three groups of 12 fibers for the 36-fiber cordage; and four groups of 12 fibers for the 48-fiber cordage.

M-Pack® Interconnect Cordage Cross Section

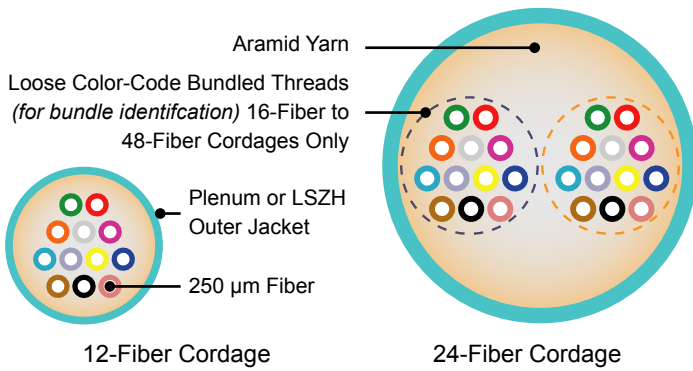

Mechanical and Environmental Performance	
Tested per Applicable Requirements of ICEA S-85-596, NEC 770, NEC type-DP, ANSI FDDI, IEEE 802(s), ISO/IEC 11801, TIA 568 and 598, ANSI-X3(s), ATM, Fiber Channel and HIPPI	
Temperature Range	
Installation	-20 °C to 60 °C (-4 °F to 140 °F)
Operation (SM)	-20 °C to 70 °C (-4 °F to 158 °F)
Operation (MM)	0 °C to 70 °C (0 °F to 158 °F)
Storage and Shipping	-40 °C to 70 °C (-40 °F to 158 °F)
Maximum Tensile Rating	
100 N (22 lb)	

Fiber Type					
Code	Single-Mode Descriptor	Grade	1310 nm	1550 nm	MCA (Z)
W	AllWave® FLEX+ ZWP Bend-Optimized Single-Mode Optical Fiber	G.657.A2	0.4 (dB/km)	0.3	4
9	AllWave FLEX Max Bend-Optimized Single-Mode Optical Fiber	G.657.B3 & G.652.D	0.4	0.3	4
Code	Multimode Descriptor	Grade	850 nm	1300 nm	MCA (Z)
K	LaserWave® FLEX G+ Multimode Optical Fiber	OM2	3.5	1.5	G
3	LaserWave FLEX 300 Multimode Optical Fiber	OM3	3.5	1.5	G
5	LaserWave FLEX 550 Multimode Optical Fiber	OM4	3.5	1.5	G
4	LaserWave WideBand Multimode Optical Fiber	OM5	3.5	1.5	G

M-Pack Interconnect Cordage Ordering Information

Example: MP38-024B-5PA¹

Part Number: **MPNN-NNNC-W X Y-Z**

MP = M-Pack	W = Fiber Type (see chart)
NN = Cordage Size	X = Jacket Material (flame retardant)
20 = 2.0 mm M-Pack Cordage (2 Fibers)	P = Plenum
30 = 3.0 mm M-Pack Cordage (4-12 Fibers)	H = Low Smoke/Zero Halogen (IEC 60332-3C)
38 = 3.8 mm M-Pack Cordage (16 & 24 Fibers)	Y = Jacket Color
45 = 4.5 mm M-Pack Cordage (32 Fibers)	Y = Yellow (Single-mode Optical Fiber)
48 = 4.8 mm M-Pack Cordage (36 & 48 Fibers)	O = Orange (62.5/125 µm Multimode Optical Fiber)
NNN = Fiber Count: 002-012, 016, 024, 032, 036 or 048	A = Aqua (LaserWave FLEX Optical Fiber)
C = Version (see chart)	Z = Maximum Cable Attenuation (see chart)

* **NOTE:** Other colors available upon customer request.

¹ Part number shown is for a 3.8 mm LaserWave FLEX 550 OM4 Laser-Optimized Multimode Fiber Plenum-Rated (OFNP) Cordage with aqua jacket, 24 250 micron fibers and standard cable print: OFS M-PACK® LASERWAVE FLEX 550 OM4 BIF OPTICAL CABLE -C- MP38-024B-5PA-G 50/125 C (UL) US TYPE OFNP [CSA OFN FT4 FT6] [MM/YY] {LOT NUMBER} {LENGTH IN FEET}

For additional information please contact your sales representative.

You can also visit our website at www.ofsoptics.com or call 1-888-fiberhelp (1-888-342-3743) USA or 1-770-798-5555 outside the USA.



Copyright © 2018 OFS Fitel, LLC.
All rights reserved, printed in USA.

OFS Marketing Communications
Doc ID: fap-229 Date: 04/18



AllWave, LaserWave and M-Pack are registered trademarks of OFS Fitel, LLC. UL is a registered trademark of Underwriters Laboratories, Inc. MTP is a registered trademark of US Conec Ltd. OFS reserves the right to make changes to the prices and product(s) described in this document at any time without notice. This document is for informational purposes only and is not intended to modify or supplement any OFS warranties or specifications relating to any of its products or services.