



A Furukawa Company

# TeraWave® ULL Single-Mode Optical Fiber

## Fiber for the Long Haul



### Features and Benefits

- Effective area of 125  $\mu\text{m}^2$
- Ultra low loss  $\leq 0.17$  dB/km at 1550 nm
- Long term attenuation and mechanical reliability
- Ultra low PMD
- Low latency
- Improved OSNR
- Supports coherent and non-coherent transmission systems
- Optimized for 100 G and beyond
- Designed for terrestrial cables
- 1.5 dB increase in non-linear limit
- High performance D-Lux® Ultra Coating
- Designed for terrestrial optical cables

### Product Description


TeraWave® ULL Single-Mode Optical Fiber is a 125  $\mu\text{m}^2$  large area, ultra low loss ITU-T G.654.B fiber designed for terrestrial optical networks. The fiber is optimized for long haul transmission in the C- and L-bands (1530 nm – 1625 nm) at 100 Gb/s, 400 Gb/s and beyond. It features a core with an effective area 49% greater than G.652.D single-mode fiber to reduce nonlinear effects that limit the reach of G.652.D fiber. As a result, TeraWave ULL fiber supports greater distances between regeneration and amplification sites, helping to lower the overall cost of deploying coherent systems – now and in the future.

TeraWave ULL fiber features very good cabling properties, and an ultra low loss to provide superior optical signal-to-noise ratio (OSNR) performance in optical links compared to low loss G.652.D fibers. The fiber takes the best aspects of highly engineered submarine fibers and combines them with cabling performance that is similar to conventional single-mode terrestrial fiber. These improvements allow system designers to increase distances between amplification and regeneration sites to help reduce overall system costs.

Operating optical systems beyond 100 G will require a significant improvement in the optical signal noise ratio (OSNR) for the end user to have regeneration distances comparable to those observed with G.652.D fiber at 100 Gb/s. Optimizing fiber attributes and amplification strategy is needed to increase the regeneration distances. The graph shows that in a 400 G system with TeraWave ULL fiber and Raman amplification regeneration distances comparable to 100 G systems using erbium-doped fiber amplifiers (EDFA) with G.652.D fiber can be achieved.

TeraWave ULL fiber supports all of the major optical amplifier types including EDFA, Raman, and hybrid amplification to help system designers and service providers cost optimize performance for each network's unique hut spacing and reach requirements.

This fiber supports longer un-regenerated reach for any coherent modulation format and can also operate with the same equipment used with conventional C- and L-band 10 Gb/s and 100 Gb/s systems. The ultra low loss and higher launch power limit of TeraWave ULL fiber can also be leveraged to increase hut spacing or supporting long distance unrepeated links.

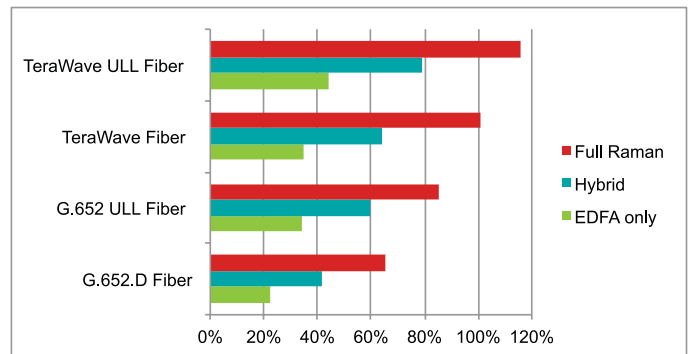

**Expected regeneration distance at 400 G compared to standard single-mode fiber at 100 G using EDFA**

For additional information please contact your sales representative.

You can also visit our website at [www.ofsoptics.com](http://www.ofsoptics.com) or call 1-888-fiberhelp (1-888-342-3743) USA or 1-770-798-5555 outside the USA.

North America  
Telephone: 508-347-8590  
Toll Free: 800-799-7732  
Fax: 508-347-1211  
E-mail: [fibersalesnar@ofsoptics.com](mailto:fibersalesnar@ofsoptics.com)

Asia Pacific  
Telephone: +852 2506 5054  
Fax: +852 2506 0166  
E-mail: [fibersalesap@ofsoptics.com](mailto:fibersalesap@ofsoptics.com)

Caribbean, Latin America  
Telephone: +1-508-347-8590  
Fax: +1-508-347-1211  
E-mail: [fibersalescala@ofsoptics.com](mailto:fibersalescala@ofsoptics.com)

Japan  
Telephone: +81-3-3286-3424  
Fax: +81-3-3286-3708 or 3190  
E-mail: [fibersalesjapan@ofsoptics.com](mailto:fibersalesjapan@ofsoptics.com)

Europe, Middle East, Africa  
Telephone: +45-43 48 3736  
Fax: +45 4348 3444  
E-mail: [ofssalesdk@ofsoptics.com](mailto:ofssalesdk@ofsoptics.com)

China  
Telephone: +86 10 6505 3660  
Fax: +86 10 65059515  
E-mail: [fibersaleschina@ofsoptics.com](mailto:fibersaleschina@ofsoptics.com)



Copyright © 2017 OFS Fitel, LLC.  
All rights reserved, printed in USA.

OFS Marketing Communications  
Doc ID: fiber-162 Date: 11/17

D-Lux and TeraWave are registered trademarks of OFS Fitel, LLC.

OFS reserves the right to make changes to the prices and product(s) described in this document at any time without notice. This document is for informational purposes only and is not intended to modify or supplement any OFS warranties or specifications relating to any of its products or services.

## Applications

A combination of ultra-low loss and higher nonlinear performance recommended for the highest spectral efficiency TeraWave® ULL Single-Mode Optical Fiber provides outstanding cable performance and design freedom for terrestrial long haul systems:

- 100 Gb/s, 400 Gb/s, and 1 Tb/s using coherent modulation formats
- Ultra-long haul 10 Gb/s and 100 Gb/s
- Terabit super-channels
- Dense wave-division multiplexing
- Optically-routed mesh networks
- Long unrepeatered spans such as those encountered in remote regions
- POP-to-landing-site connections for submarine cables

Product Specifications	TeraWave® ULL Optical Fiber
<b>Physical Characteristics</b>	
Clad Diameter	125.0 ± 0.7 μm
Clad Non-Circularity	≤ 0.7 %
Core/Clad Concentricity Error (Offset)	≤ 0.8 μm
Coating Diameter (Natural)	240 - 250 μm
Coating-Clad Concentricity Error (Offset)	≤ 12 μm
Tensile Proof Test (Other proof test levels available on request)	100 kpsi (0.69 GPa)
Coating Strip Force	Range: 1.0 N ≤ CSF ≤ 9.0 N
Standard Reel Lengths	Up to 50.4 km (31.3 miles)
<b>Optical Characteristics</b>	
Attenuation	Maximum
at 1550 nm	≤ 0.17 dB/km, typical 0.168 dB/km
at 1625 nm	≤ 0.20 dB/km
Attenuation vs. Wavelength	
Range (nm)	Reference (nm) λ      α
1525 – 1575	1550                      0.03
1475 – 1625	1550                      0.05
The attenuation in a given wavelength range does not exceed the attenuation of the reference wavelength (λ) by more than the value α.	
Attenuation Uniformity / Point Discontinuities at 1310 nm and 1550 nm	≤ 0.05 dB
Macrobending Attenuation:	100 Turns 30 mm radius ≤ 0.1 dB at 1625 nm
Chromatic Dispersion	
Chromatic Dispersion at 1550 nm	≤ 22 ps/nm-km
Chromatic Dispersion Slope at 1550 nm	< 0.070 ps/nm <sup>2</sup> -km
Group Refractive Index at 1550 nm	1.465
Mode Field Diameter	12.4 ± 0.5 μm
Effective Area at 1550	Typical: 125 μm <sup>2</sup>
Cable Cut-off Wavelength (λ <sub>cc</sub> )	≤ 1520 nm
Polarization Mode Dispersion (PMD) <sup>1</sup>	
Fiber PMD Link Design Value (LDV) <sup>2</sup>	≤ 0.04 ps/√km
Maximum Individual Fiber	≤ 0.1 ps/√km
Typical Fiber LMC PMD	≤ 0.02 ps/√km
<sup>1</sup> As measured with low mode coupling (LMC) technique in fiber form, value may change when cabled. Check with your cable manufacturer for specific PMD limits in cable form.	
<sup>2</sup> The PMD Link Design Value complies with IEC 60794-3, September 2001 (N = 20, Q = 0.01%). Details are described in IEC 61282-3 TR Ed 2, October 2006.	
<b>Environmental Characteristics (at 1310, 1550 &amp; 1625 nm)</b>	
Temperature Cycling (-60 + 85 °C)	≤ 0.05 dB/km
High Temperature Aging (85 ± 2 °C)	≤ 0.05 dB/km
Temperature & Humidity Cycling (at -10 to +85 °C and 85 to ~98% RH)	≤ 0.05 dB/km
Water Immersion (23 ± 2 °C)	≤ 0.05 dB/km