




A Furukawa Company

PowerGuide® DT ADSS Cable

Totally Gel-Free, ADSS Cable Helps Save Time and Money on Power and FTTH Network Deployments



PowerGuide DT ADSS Cable

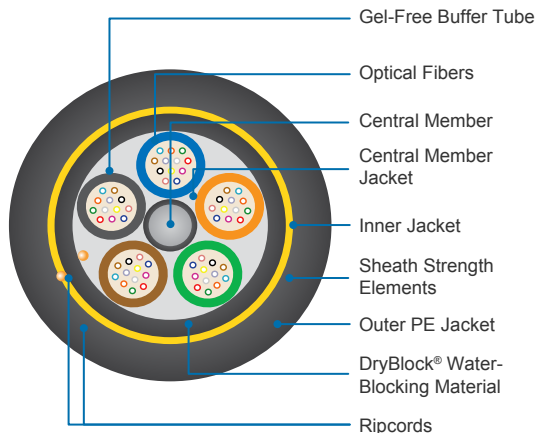

PowerGuide DT Cable Cross-Section

Features and Benefits

- Industry-first, gel-free ADSS cable for cleaner, faster and less costly deployments
- Efficient, cost-effective solution for short cable spans ranging up to 1,500 feet (460 meters) ¹
- Custom engineered per application
- Lighter weight, gel-free cable helps reduce cable end preparation time ²
- May enable significant cost savings from the use of less costly attachment hardware ³
- Allows up to a 10% greater span length capability ⁴
- Fiber counts up to 288
- Cleaner work environment helps support faster splicing with higher yields
- Environmentally-friendly cable helps reduce waste and the need for special cleaning solvents
- Single cable outer diameter for fiber counts of 2 to 60 for simplified hardware selection and splicing
- Available with OFS application-specific fibers including AllWave® Zero Water Peak (ZWP) and AllWave+ Single-Mode, TrueWave® RS Low Water Peak (LWP) and Multimode Fibers
- Highly durable and reliable for power distribution networks, FTTH deployments, direct use in ducts, aerial-to-duct transitions and aerial-to-underground installations

Product Description

As the industry's first completely gel-free, double jacket All-Dielectric, Self-Supporting (ADSS) Loose Tube Cable, the groundbreaking PowerGuide DT Cable helps save time and money on installation for cable spans ranging up to 1,500 feet¹ (460 meters). This outstanding, cost-effective solution is an excellent choice for power distribution networks, FTTH deployments and duct installations.

OFS combines its leading ADSS cable design with its field-proven, gel-free loose tube cable construction to create each PowerGuide ADSS Cable. To construct this cable, optical fibers are placed in flexible buffer tubes that contain a specially-engineered, super-absorbent yarn that delivers water blocking "on demand" without the use of messy gels and filling compounds. This patented water-blocking system has been successfully deployed for a decade in our Fortex™ DT Cable product families. Next, the color-coded buffer tubes are stranded around a dielectric central member using the reverse oscillating lay (ROL) stranding technique for easy, mid-span fiber access. Additional gel-free, super-absorbent material is then applied to the cable core and an inner polyethylene (PE) jacket is added. Finally, aramid yarn strength elements and a second robust outer PE jacket are applied to complete the construction of a totally gel-free, lightweight cable that is durable, reliable and easy to handle and install.

¹ Maximum span range from 460 feet to 1,500 feet, depending on loading conditions, fiber counts, installation conditions and clearance requirements. Contact OFS for specific details for your application.

Why the PowerGuide DT ADSS Cable?

As the world's first totally gel-free, double jacket ADSS cable, PowerGuide DT Cable offers the same high performance and reliability as its gel-filled counterparts. Plus, it's completely gel-free, even inside of the buffer tubes. By eliminating gels and filling compounds, this cable helps enable substantial savings on installation time and labor costs. In fact, when compared with similar gel-filled ADSS cables, PowerGuide DT Cable can help cut cable end preparation time by up to 80%², helping to significantly reduce labor costs for splicing and terminations.

PowerGuide DT Cable also offers a significantly lower overall cable weight, which results in easier handling and lower operating tensions on the poles. This reduction in cable weight and operating tensions may also enable the use of less costly, lighter duty attachment hardware³, and allows up to a 10% greater span length capability than similar, gel-filled cables⁴. In addition, this lightweight cable is easier to handle and install, creating less of a load on your work crew and plant infrastructure.

The PowerGuide DT Cable's gel-free design also helps save on labor costs by offering faster splicing with higher first pass yields due to a cleaner work environment. By removing all gels and filling compounds, this cable allows virtually effortless splice preparation, while keeping your tools, workspace, closures and cabinets cleaner and safer. This cable also enables additional cost savings by helping to minimize or eliminate the need for special cleaning solvents and wipes, along with the expense of cleaning splicer/cleaver equipment. These advantages combine to make PowerGuide DT ADSS Cable an "environmentally-friendly" solution that also helps save on deployment time and expense.

In summary, the PowerGuide DT ADSS Cable is an outstanding choice for power distribution networks and FTTH deployments, and for aerial use (self supporting), direct use in ducts, aerial-to-duct transitions and aerial-to-underground installations.

² Based on field studies examining the time required to prepare cable ends for splicing and terminations for similar gel-filled ADSS cables as compared with PowerGuide DT Cable.

³ For a typical 250-foot cable run, under NESC Medium Loading Conditions, the gel-free cable construction allows for the use of light duty attachment hardware.

⁴ For a typical, gel-free 144-fiber ADSS cable at 500-foot span lengths under NESC Medium Loading Conditions, there can be a gain of up to a 10% increase in span length capability when compared with equivalent strength systems in similar, gel-filled cables.

⁵ Fortex DT Loose Tube Cable was a Fiber Optic Technology 2003 Tech Award Winner.

⁶ Fortex DT Loose Tube Cable was the industry's first gel-free loose tube cable to meet the water-blocking requirements of Telcordia Technologies' GR-20-CORE outside plant standards.

Specifications

Fiber Count:	2-288
Outer Diameter - in. (mm)	Variable
Weight - lb/kft (kgm/km)	Variable

Performance Standard

Tested per Applicable Requirements of Telcordia Technologies GR-20, ANSI/ICEA S-87-640, EIA/TIA, IEEE

Handling

Minimum Bend Radius, With Load	15 x OD*
Minimum Bend Radius, With No Load	10 x OD*
Minimum Bend Radius, Storage Coils	10 x OD*
Maximum Rated Cable Load (MRCL):	Variable
Maximum Long Term Load:	Variable

Temperature: Installation: -22 °F to 158 °F (-30 °C to 70 °C)
Operation: -40 °F to 158 °F (-40 °C to 70 °C)
Storage: -40 °F to 167 °F (-40 °C to 75 °C)

* NOTE: OD = Outer Diameter of Cable

You Can Rely on OFS

PowerGuide DT ADSS Cable is the latest OFS innovation to incorporate many of the company's developments in gel-free fiber optic cable design. In 2003, OFS introduced another groundbreaking cable, the award-winning⁵, gel-free Fortex DT Loose Tube Cable⁶. Today, with more than a decade of field-proven, gel-free cable performance in the ground and in the air, OFS continues to demonstrate its industry leadership in innovation with the first-to-market, gel-free, double jacket ADSS cable.

Fiber Type²

	Fiber (S1)	Fiber (S2)	Fiber (SF)	Fiber Standards	Fiber Wavelengths (nm)	Typical * Attenuation (dB/km)	Maximum Cable on Reel Attenuation (dB/km)
Single-Mode Fiber							
AllWave® ZWP Fiber	3	B	E	G.652.D	1310/1385/1550	-	0.35/0.31/0.25
AllWave+ ZWP Fiber	3	C	E	G.652.D/G.657.A1	1310/1385/1550	-	0.35/0.31/0.25
AllWave FLEX ZWP Fiber	5	B	E	G.652.D/G.657.A1	1310/1385/1550	-	0.35/0.31/0.25
AllWave Low Loss Fiber	3	A	E	G.652.D	1310/1385/1550	0.33/0.31/0.19	0.34/0.31/0.22
AllWave One Fiber	3	F	E	G.652.D/G.657.A1	1310/1385/1550	0.33/0.31/0.19	0.34/0.31/0.22
TrueWave® RS LWP Fiber	6	2	6	G.655.C&D	1550	0.21	0.25
TeraWave® Fiber	6	2	R	G.654.B	1550	0.19	0.25
TeraWave ULL Fiber	6	9	R	G.654.B	1550	0.18	0.22
Multimode Fiber							
62.5 µm Fiber	R	U	9	OM1 62.5 µm	850/1300	-	3.4/1.0
LaserWave® FLEX 300 Fiber	R	F	2	OM3 50 µm	850/1300	-	2.4/0.7
LaserWave FLEX 550 Fiber	R	H	2	OM4 50 µm	850/1300	-	2.4/0.7

PowerGuide DT ADSS Loose Tube Cable Ordering Information

Example: AT-3BE27NT-NNN - E1, E1, E3, E4¹ Part Number: AT- S1 S2 SF S3 S4 S5 S6 - NNN - [E1] [E2] [E3] [E4]

<p>S1 = Fiber Selection See S1 in Fiber Type table above</p> <p>S2 = Fiber Transmission Performance See S2 in Fiber Type table above</p> <p>SF = Fiber Type² See SF in Fiber Type table above</p>	<p>S3 = Sheath Construction 2 = Double Jacket All Dielectric</p> <p>S4 = Tensile Load 7 = PowerGuide DT Double Jacket</p> <p>S5 = Core Type N = Totally Gel-Free ADSS Loose Tube</p>	<p>S6 = Fibers per Tube T = 12 fibers</p> <p>NNN = Fiber Count = 002 – 288</p> <p>Custom/Special*: [E1] [E2] [E3] [E4] Outer Jacket [E1]* and Dielectric Sheath Strength Elements [E2] [E3] [E4]*</p>
---	---	---

¹ Part Number shown is for a PowerGuide DT ADSS Cable with standard AllWave ZWP attenuation and standard cable print. Maximum AllWave ZWP attenuation: 0.35/0.31/0.27/0.25/0.27 dB/km @ 1310/1385/1490/1550/1625 nm
Standard Print, example for PowerGuide DT ADSS Cable: OFS OPTICAL CABLE AT-3BE27NT-NNN-CMEA [MM-YY] (UL) US TYPE OFNR [HANDSET SYMBOL] NNN] F [SERIAL #]

² Contact OFS Order Management for information on other cable variations, including additional fiber types, attenuation, and custom cable print.
³ **Custom/Special:** Consult with us regarding your application, span lengths, and loading conditions to complete the custom design and part number of your complete sheath strength system.

NOTE: For more information regarding typical attenuation as well as attenuation parameters on Link Design Value (LDV) (Maximum end-to-end attenuation over a concatenated span), please see OFS Application Note AN-111 which can be downloaded at www.ofsoptics.com or contact your OFS representative.

For additional information please contact your sales representative.

You can also visit our website at www.ofsoptics.com or call 1-888-fiberhelp (1-888-342-3743) USA or 1-770-798-5555 outside the USA.



Copyright © 2018 OFS Fitel, LLC.
All rights reserved, printed in USA.

OFS Marketing Communications
Doc ID: osp-173 Date: 02/18



AllWave, DryBlock, LaserWave, PowerGuide, TeraWave and TrueWave are registered trademarks of OFS FITEL, LLC.

OFS reserves the right to make changes to the prices and product(s) described in this document at any time without notice. This document is for informational purposes only and is not intended to modify or supplement any OFS warranties or specifications relating to any of its products or services.