


# Loose Tube Fibre Optic Outdoor Cable

24 Element All Dielectric Dry Core Design

## MiDia<sup>®</sup> Dielectric Rodent Protected Cable



Issue February 2015  
according to **OFS Generic Specification**

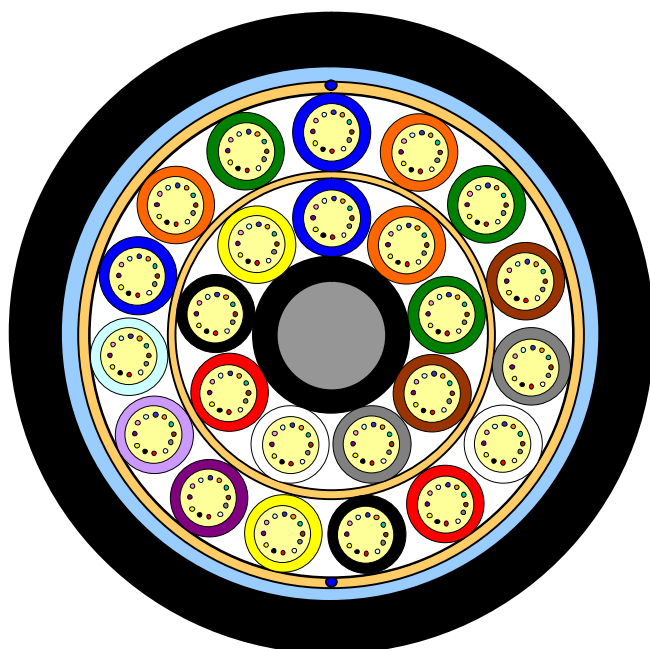

### Application

Optimised for Air-Blown Installation

### Design

- Optical Fibres
- Gel-filled Buffer Tubes
- Non-metallic Central Member
- Water Blocking Material
- Double Layer of glass yarns
- Ripcord
- PE-Jacket

### Features

- All Dielectric Rodent Protected Cable – Double layer of Glass elements for Protection against Rodents
- Small tubes for a reduced outer diameter
- Dry Core Design – Cable core water blocked by means of dry “water swellable” technology - for quicker, cleaner cable prep for jointing
- Two Layer Design for a smaller cable diameter and less cable weight
- Individual coloured tubes

Version illustrated is the 288 Fibre Cable

Fibre Count	Tubes	Core Design	Outer Diameter [mm]	Cable Weight [kg/km]	Standard Length [m]	AT-Code**
<b>12 Fibres per Tube</b>						
240	20	1+24 (4 Fillers*)	14.0	165	2000 / 4000 / 6000	AT-[ ][ ]55CT-240-NM
288	24	1+24	14.0	165	2000 / 4000 / 6000	AT-[ ][ ]55CT-288-NM

This table shows nominal diameter and weight values which may differ in shipments.

\*Fillers are natural coloured \*\*Please refer to the OFS AT- Code. The blanks specify the fibre type.

## Identification

### Fibre Colour Code:

1	Blue	2	Orange	3	Green	4	Brown	5	Grey	6	White
7	Red	8	Black	9	Yellow	10	Violet	11	Rose	12	Aqua

Alternative fibre colour code available on request

### Tube Colour Code:

1+10+22	Blue	2+11+23	Orange	3+12+24	Green	4+13	Brown	5+14	Grey	6+15	White
7+16	Red	8+17	Black	9+18	Yellow	19	Violet	20	Rose	21	Aqua

Alternative tube colour code available on request

## Sheath Marking

OFS OPTICAL CABLE MIDIA DIELECTRIC RODENT PROTECTED [ID] [MM/YYYY] [Handset Sign] xxxF [Meter Marking]

Alternative sheath printing available on request.

# Loose Tube Fibre Optic Outdoor Cable

## 24 Element All Dielectric Dry Core Design

### MiDia<sup>®</sup> Dielectric Rodent Protected Cable



Issue February 2015  
according to **OFS Generic Specification**

#### Mechanical Properties and Environmental Behaviour

Tests according to IEC 60794

	Parameter	Requirement	Value
<b>Tensile Performance:</b> IEC 60794-1-21-E1A and E1B	Long term load	- No attenuation increase* - No fibre strain	Load: 1000 N
	Short term load, during installation	- No changes in attenuation before versus after load - Max. fibre strain 0.33%	Load: 1.5 x W <i>W is the weight of the cable in N</i>
<b>Crush Performance:</b> IEC 60794-1-21-E3A	Long term load	- No attenuation increase*	Load (Plate / Plate): 500 N
	Short term load	- No changes in attenuation before versus after load - No damage**	Load (Plate / Plate): 2000 N
<b>Bending Performance:</b> IEC 60794-1-21-E11	Handling fixed installed	- No attenuation increase*	Bend radius: 200 mm
	During installation (under load)	- No changes in attenuation before versus after load	Bend radius: 20 x D <i>D is the cable diameter</i>
<b>Temperatures:</b> IEC 60794-1-22-F1	Operation	- No attenuation increase*	-30 to +60°C
	Installation		-15 to +40°C
	Storage/Shipping		-40 to +60°C

\*No changes in attenuation means that any changes in measurement value, either positive or negative within the uncertainty of measurement shall be ignored. The total uncertainty of measurement shall be less than of equal to 0.05 dB.

\*\*Mechanical damage – when examined visually without magnification, there shall be no evidence of damage to the sheath. The imprint of plates will not be considered as damage.

#### Shipping Information

Cable Length	Drum Dimensions (approx.)		Shipping Weight (calc.)	
	Diameter(battened)	Width	Without lagging	With lagging
2000 m	1250 mm	790 mm	410 kg	450 kg
4000 m	1600 mm	1055 mm	790 kg	850 kg
6000 m	1750 mm	1055 mm	1140 kg	1200 kg

The shipping information are given for one-way reels. Reusable reels are available on request.

The information is believed to be accurate at time of issue.

OFS reserves the right to improve, enhance and modify the features and specifications of OFS products without prior notification.

Please ensure you have the latest version of the data sheet.

This data sheet is property of OFS.

For additional information please contact your sales representative.

You can also visit our

website at <http://www.ofsoptics.com>.

Telephone: +49 (0) 228 7489 201

Email: [cableinfo@ofsoptics.com](mailto:cableinfo@ofsoptics.com)

MiDia is a registered trademark of Fitel USA Corp.

