


# PowerGuide® SkyLight

Issue May 2021  
according to **OFS Generic Specification**

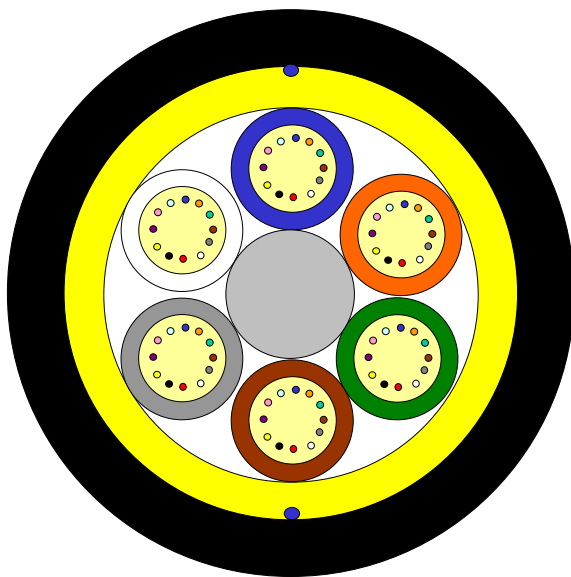

### Application

Optimized for Aerial- and Duct Installation with fiber counts up to 72 fibers

### Design

- Optical fibers
- Gel-filled buffer tubes
- Non-metallic central member
- Water blocking threads
- Non-metallic aramid strength elements
- Ripcords
- Outer HDPE-jacket

### Benefits

- Excellent, cost- effective option for short aerial cable spans
- Outstanding optical performance, durability and field reliability
- Fast, one-step installation for valuable time and cost savings
- Small cable diameter and bend radius for easy deployment in aerial- to- underground installation
- Easily strippable sheath for quick, convenient cable preparation

**Version illustrated is the 72 Fiber 6 Element Cable**

| Fiber Count | Tubes   | Core Design      | Outer Diameter [mm] | Cable Weight [kg/km] | AT-Code**                 |
|-------------|---------|------------------|---------------------|----------------------|---------------------------|
| 12          | 1 (12F) | 1+6 (5 Fillers*) | 10.4                | 90                   | AT-[ ][ ][ ]17UT-012-CNGA |
| 24          | 2 (12F) | 1+6 (4 Fillers*) | 10.4                | 90                   | AT-[ ][ ][ ]17UT-024-CNGA |
| 36          | 3 (12F) | 1+6 (3 Fillers*) | 10.4                | 90                   | AT-[ ][ ][ ]17UT-036-CNGA |
| 48          | 4 (12F) | 1+6 (2 Fillers*) | 10.4                | 90                   | AT-[ ][ ][ ]17UT-048-CNGA |
| 60          | 5 (12F) | 1+6 (1 Filler*)  | 10.4                | 90                   | AT-[ ][ ][ ]17UT-060-CNGA |
| 72          | 6 (12F) | 1+6              | 10.4                | 90                   | AT-[ ][ ][ ]17UT-072-CNGA |

This table shows nominal diameter and weight values which may differ in shipments.

\*Fillers are natural colored

\*\*Please refer to the OFS AT- Code. The blanks specify the fiber type.

## Identification

### Tube and Fiber Color Code :

|   |      |   |        |   |        |    |        |    |      |    |       |
|---|------|---|--------|---|--------|----|--------|----|------|----|-------|
| 1 | Blue | 2 | Orange | 3 | Green  | 4  | Brown  | 5  | Grey | 6  | White |
| 7 | Red  | 8 | Black  | 9 | Yellow | 10 | Violet | 11 | Pink | 12 | Aqua  |

Alternative tube and fiber color code available on request

# All-Dielectric, Self Supporting (ADSS) Aerial Loose Tube Fiber Optic Cable

Dry core design

## PowerGuide® SkyLight



Issue May 2021  
according to **OFS Generic Specification**

### Sheath Marking:

**OFS OPTICAL ADSS CABLE [ID] [MM/YYYY] [Handset Sign] xxxF [Meter Marking]**

*Alternative sheath printing available on request.*

*In case of order the exact sheath printing text will be clarified with the customer.*

### Shipping Information

| Cable Length | Drum Dimensions (approx.) |         | Shipping Weight (calc.) |              |
|--------------|---------------------------|---------|-------------------------|--------------|
|              | Diameter(battened)        | Width   | Without lagging         | With lagging |
| 2 Km         | 1050 mm                   | 790 mm  | 240 kg                  | 260 kg       |
| 4 Km         | 1250 mm                   | 790 mm  | 440 kg                  | 480 kg       |
| 6 Km         | 1600 mm                   | 1055 mm | 670 kg                  | 730 kg       |
| 8 Km         | 1600 mm                   | 1055 mm | 850 kg                  | 910 kg       |

*The shipping information are given for one-way reels. Reusable reels are available on request.*

### Temperatures

|                   |                  |                |
|-------------------|------------------|----------------|
| IEC 60794-1-22-F1 | Operation        | -40°C to +70°C |
|                   | Installation     | -15°C to +60°C |
|                   | Storage/Shipping | -40°C to +70°C |

### Sag and Tension Calculation

AT-[ ] [ ] [ ] 17UT-xxx-CNGA

### NESC Light Loading Conditions

|                 |                                  |
|-----------------|----------------------------------|
| Ice Thickness   | 0 mm                             |
| Wind Pressure   | 431 N/m <sup>2</sup> (95.5 km/h) |
| Low Temperature | - 1 °C                           |
| Safety Factor   | 0.73 N/m                         |

Tension @ Maximum Span for 1,0 % Installation Sag

|                                    |        |
|------------------------------------|--------|
| MRCL (Maximum Rated Cable Load)    | 2300 N |
| MIT (Maximum Installation Tension) | 460 N  |

|                          |                          |
|--------------------------|--------------------------|
| Maximum Span             | 70 m                     |
| Cable Weight             | 90 kg/km                 |
| Cable Diameter           | 10.4 mm                  |
| Installation Temperature | 23 °C                    |
| Cable Modulus            | 940.3 kg/mm <sup>2</sup> |
| CTE (C <sup>-1</sup> )   | 1.24E- 05                |

# PowerGuide® SkyLight

Issue May 2021  
according to OFS Generic Specification

## Recommended hardware for spans up to 70m

**Dead End Assembly:**

TELENCO® ACADSS anchoring clamp  
Model ACADSS 10 (PN 0318)

**Vibration Dampers:**

TELENCO® Anti-vibration damper  
Model VIB083 (PN 09139)

**Suspension Support:**

TELENCO® J-hook suspension  
Model JHC10-15 (PN 0438), Model JHC8 (PN 09730), Model  
JT8 (PN 09792), Model JTP (PN 90583) + F8-12 (PN 90919)  
TELENCO® Dielectric suspension  
Model DS8 (PN 09215)

## Pertinent installation information

|  |   |
|--|---|
| <b>Maximum rated cable load (MRCL)</b>           | <b>2.3 kN</b>   |
| <b>Bending Performance: (IEC 60794-1-21-E11)</b> |   |
| <b>Handling fixed installed</b>                  | <b>- No attenuation increase*</b>                           |
| <b>During installation (under Load)</b>          | <b>- No changes in attenuation before versus after load</b> |
|  | <b>Bend radius: 120 mm</b>                                  |
|  | <b>Bend radius: 240 mm</b>                                  |

\*No changes in attenuation means that any changes in measurement value, either positive or negative within the uncertainty of measurement shall be ignored. The total uncertainty of measurement shall be less than or equal to 0.05 dB.

## When to use hardware

**Dead End Assembly**

- Used whenever a cable should not slip
  - Cable start and end points
  - Where line angles exceed 20°
  - Road, river, railroad crossings
  - Closure locations
- Different types available dependent upon cable design and application



**Tangent and Suspension Supports**

- Typically used in small line angle (<20°, depending on type) situations
- Provides vertical support, not designed to support cable tension
- Multiple types depending span length and application
- Allows cable slippage during imbalanced load situations



**Vibration Dampers**

- ADSS cables can experience Aeolian vibration under certain circumstances
- Circumstances conducive to Aeolian vibration
- Laminar wind flow, Wide open spaces, Light winds, High tensions
- Vibration dampers minimize the effects of this vibration



## Installation document references

- IP 014 PowerGuide® Installation
- IP 014A PowerGuide® ADSS CABLE Installation Guideline Distribution Line Applications
- IP 006 PowerGuide® Sheath Removal
- IP 017 PowerGuide® Hardware Installation

- AN-101 Maximum Rated Cable Loads & Minimum Bending Diameter
- AN-203 Space Potential Calculation for PowerGuide® ADSS Cable

Installation documents available upon request.

# All-Dielectric, Self Supporting (ADSS) Aerial Loose Tube Fiber Optic Cable

Dry core design

## PowerGuide® SkyLight



Issue May 2021  
according to **OFS Generic Specification**

### PowerGuide SkyLight Cable Ordering Information

*Example: AT-3BE17UT-NNN<sup>1</sup>-CLIB*

| Fiber <sup>2</sup> Sheath Core Fiber Count Custom <sup>3</sup>   |  |  |
|--|--|--|
| <b>Part Number: AT-S1 S2 SF S3 S4 S5 S6 - NNN - CLIB</b>   |  |  |
| <p><b>S1= Fiber Selection</b><br/>                     3= 1310/1550 nm (AllWave® ZWP Fiber)<br/>                     1310/1550 nm (AllWave® + ZWP Fiber)<br/>                     5= 1310/1550 nm (AllWave®FLEX ZWP Fiber)<br/>                     7= 1310/1550 nm (AllWave®FLEX + ZWP Fiber)</p> | <p><b>S2= Fiber Transmission Performance</b><br/> <b>B=</b> 0.35/0.31/0.27/0.25/0.27 dB/km @<br/>                     1310/1385/1490/1550/1625 nm<br/>                     (AllWave® ZWP Fiber)<br/> <b>E=</b> 0.36/0.31/0.27/0.25/0.27 dB/km @<br/>                     1310/1385/1490/1550/1625 nm<br/>                     (AllWave®FLEX ZWP Fiber)<br/>                     (AllWave®FLEX + ZWP Fiber)<br/> <b>C=</b> 0.35/0.31/0.27/0.25/0.27 dB/km @<br/>                     1310/1385/1490/1550/1625 nm (AllWave® + ZWP Fiber)</p> | <p><b>SF= Fiber Type</b><br/>                     E= AllWave® ZWP Single Mode</p> <p><b>S3= Sheath Construction</b><br/>                     1= All-Dielectric single jacket</p> <p><b>S4= Tensile Load</b><br/>                     7= ADSS</p> |
| <p><b>S5= Core Type</b><br/>                     U= Dry Core Loose Tube</p>  | <p><b>S6= Fibers per Tube</b><br/>                     6= 6 Fibers<br/>                     8= 8 Fibers<br/>                     N= 10 Fibers<br/>                     T= 12 Fibers</p>  | <p><b>NNN= Fiber Count</b></p>   |

<sup>1</sup> Part Number shown is for PowerGuide ADSS Cable with 250 µm Single Mode AllWave ZWP Fibers with maximum attenuation: 0.35/0.31/0.27/0.25/0.27 dB/km @ 1310/1385/1490/1550/1625 nm .

<sup>2</sup> Contact OFS sales representative for information on other cable variations, including additional fiber types, composite cables and attenuation.

<sup>3</sup> Consult with us regarding your application, span lengths and loading conditions to complete the custom design and part number of your complete sheath strenghts system.

The information is believed to be accurate at time of issue.  
 OFS reserves the right to improve, enhance and modify the features and specifications of OFS products without prior notification.  
 Please ensure you have the latest version of the data sheet.  
 This data sheet is property of OFS.  
 For additional information please contact your sales representative.  
 You can also visit our website at <http://www.ofsoptics.com>.  
 Telephone: +49 (0) 228 7489 201  
 Email: [cableinfo@ofsoptics.com](mailto:cableinfo@ofsoptics.com)

