

Loose Tube Fibre Optic Outdoor Cable


6 Element Dry Core Design

MiDia® Armour



Issue October 2023

according to OFS FURUKAWA SOLUTIONS Generic Specification

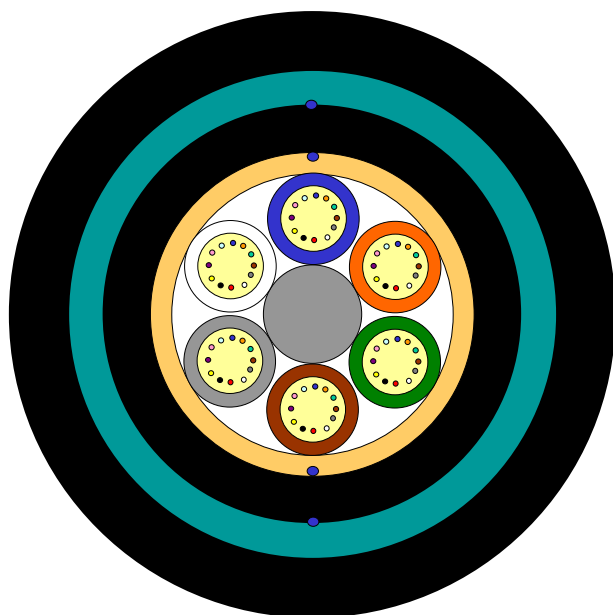

Application

Mainly used for direct burial and for Duct-Installation (HD-PE Tubes) by Cable Pulling

Design

- Optical Fibres
- Gel-filled Buffer Tubes
- Non-metallic Central Member
- Water Blocking Material
- Inner PE-Jacket
- Corrugated Steel Tape
- Ripcords
- Outer PE-Jacket

Features

- Armour Cable – high mechanical protection and effective barrier against rodents and Lightning
- Small tubes for a reduced outer diameter
- Dry Core Design – Cable core water blocked by means of dry “water swellable” technology - for quicker, cleaner cable prep for jointing
- Individual coloured tubes

Version illustrated is the 72 Fibre Cable

Fibre Count	Tubes	Core Design	Outer Diameter [mm]	Cable Weight [kg/km]	Standard Length [m]	AT-Code**
12	1 (12F)	1+6 (5 Fillers*)	12.2	150	2000 / 4000 / 6000 / 8000	AT-[][] NFCT-012
24	2 (12F)	1+6 (4 Fillers*)	12.2	150	2000 / 4000 / 6000 / 8000	AT-[][] NFCT-024
36	3 (12F)	1+6 (3 Fillers*)	12.2	150	2000 / 4000 / 6000 / 8000	AT-[][] NFCT-036
48	4 (12F)	1+6 (2 Fillers*)	12.2	150	2000 / 4000 / 6000 / 8000	AT-[][] NFCT-048
48	5 (12F)	1+6 (1 Filler*)	12.2	150	2000 / 4000 / 6000 / 8000	AT-[][] NFCT-060
72	6 (12F)	1+6	12.2	150	2000 / 4000 / 6000 / 8000	AT-[][] NFCT-072

This table shows nominal diameter and weight values which may differ in shipments.

*Fillers are natural coloured and evenly distributed over the positions.

**Please refer to the OFS AT- Code. The blanks specify the fibre type.

Identification

Tube and Fibre Colour Code:

1	Blue	2	Orange	3	Green	4	Brown	5	Grey	6	White
7	Red	8	Black	9	Yellow	10	Violet	11	Rose	12	Aqua

Alternative tube and fibre colour code available on request

Sheath Marking

OFS OPTICAL CABLE MIDIA ARMOUR [ID] [MM/YYYY] [Handset Sign] xxxF [Meter Marking]

Alternative sheath printing available on request.

In case of order the exact sheath printing text will be clarified with the customer.

Loose Tube Fibre Optic Outdoor Cable

6 Element Dry Core Design

MiDia® Armour



Issue October 2023

according to OFS FURUKAWA SOLUTIONS Generic Specification

Mechanical Properties and Environmental Behaviour

Tests according to IEC 60794

	Parameter	Requirement	Value
Tensile Performance: IEC 60794-1-21-E1A and E1B	Long term load	- No attenuation increase* - No fibre strain	Load: 1000 N
	Short term load, during installation	- No changes in attenuation before versus after load - Max. fibre strain 0.5%	Load: 1.0 x W <i>W is the weight of the cable in N</i>
Crush Performance: IEC 60794-1-21-E3A	Long term load	- No attenuation increase*	Load (Plate / Plate): 1000 N
	Short term load	- No changes in attenuation before versus after load - No damage**	Load (Plate / Plate): 3000 N
Bending Performance: IEC 60794-1-21-E11	Handling fixed installed	- No attenuation increase*	Bend radius: 15x D
	During installation (under load)	- No changes in attenuation before versus after load	Bend radius: 20x D <i>D is the cable diameter</i>
Temperatures: IEC 60794-1-22-F1	Operation	- No attenuation increase*	-30 to +70°C
	Installation		-15 to +60°C
	Storage/Shipping		-40 to +70°C

*No changes in attenuation means that any changes in measurement value, either positive or negative within the uncertainty of measurement shall be ignored. The total uncertainty of measurement shall be less than or equal to 0.05 dB.

**Mechanical damage – when examined visually without magnification, there shall be no evidence of damage to the sheath. The imprint of plates will not be considered as damage.

Shipping Information

Cable Length	Drum Dimensions (approx.)		Shipping Weight (calc.)
	Diameter	Width	Drum + Cable
2000 m	1200 mm	780 mm	365 Kg
4000 m	1400 mm	780 mm	690 Kg
6000 m	1550 mm	1060 mm	1030 Kg
8000 m	1700 mm	1060 mm	1370 Kg

The shipping information are given for one-way reels. Reusable reels are available on request.

The information is believed to be accurate at time of issue.

OFS FURUKAWA SOLUTIONS reserves the right to improve, enhance and modify the features and specifications of OFS FURUKAWA SOLUTIONS products without prior notification. Please ensure you have the latest version of the data sheet. This data sheet is property of OFS FURUKAWA SOLUTIONS.

For additional information please contact your sales representative.

You can also visit our website at <http://www.ofsoptics.com>.

Telephone: +49 (0) 228 7489 201

Email: cableinfo@ofsoptics.com

MiDia is a registered trademark of Fitel USA Corp.

