

Loose Tube Fibre Optic Outdoor Cable


12 Element Dry Core Design

MiDia^{®200} Armour



Issue November 2023

according to **OFS FURUKAWA SOLUTIONS Generic Specification**

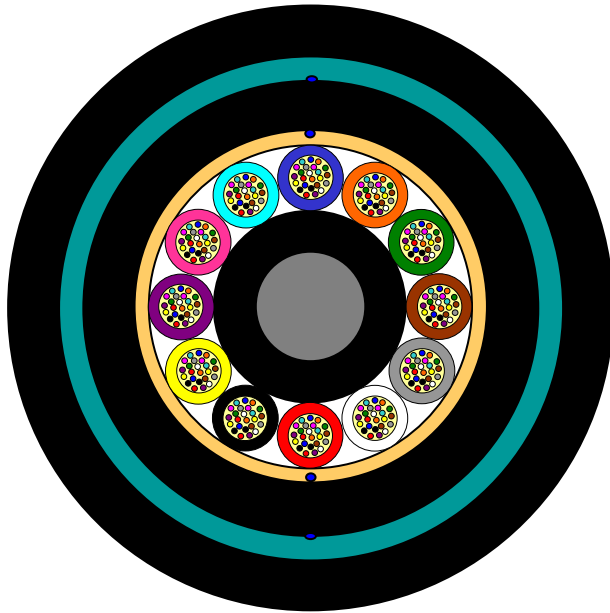

Application

Mainly used for direct burial and for Duct-Installation (HD-PE Tubes) by Cable Pulling

Design

- Optical Fibres
- Gel-filled Buffer Tubes
- Non-metallic Central Member
- Water Blocking Material
- Inner PE-Jacket
- Corrugated Steel Tape
- Ripcords
- Outer PE-Jacket

Features

- Armour Cable – high mechanical protection and effective barrier against rodents and Lightning
- Small tubes for a reduced outer diameter
- Dry Core Design – Cable core water blocked by means of dry “water swellable” technology - for quicker, cleaner cable prep for jointing
- Individual coloured tubes

Version illustrated is the 288 Fibre Cable

| Fibre Count | Tubes | Core Design | Outer Diameter [mm] | Cable Weight [kg/km] | Standard Length [m] | AT-Code** |
|-------------|-------|-------------------|---------------------|----------------------|---------------------|----------------|
| 240 | 10 | 1+12 (2 Fillers*) | 15.7 | 240 | 2000 / 4000 / 6000 | AT-XEENFCF-240 |
| 288 | 12 | 1+12 | 15.7 | 240 | 2000 / 4000 / 6000 | AT-XEENFCF-288 |

X= 8 (200 micron AllWave[®] FLEX Zero-Water Peak Singlemode Fiber)

X = 9 (200 micron AllWave[®] FLEX+ Zero-Water Peak Singlemode Fiber)

This table shows nominal diameter and weight values which may differ in shipments.

*Fillers are natural coloured **Please refer to the OFS FURUKAWA SOLUTIONS AT- Code.

Identification

Tube Colour Code:

| | | | | | | | | | | | |
|---|------|---|--------|---|--------|----|--------|----|------|----|-------|
| 1 | Blue | 2 | Orange | 3 | Green | 4 | Brown | 5 | Grey | 6 | White |
| 7 | Red | 8 | Black | 9 | Yellow | 10 | Violet | 11 | Rose | 12 | Aqua |

Fibre Colour Code:

| | | | | | | | | | | | |
|----|-------|----|---------|----|---------|----|---------|----|-------|----|--------|
| 1 | Blue | 2 | Orange | 3 | Green | 4 | Brown | 5 | Grey | 6 | White |
| 7 | Red | 8 | Black | 9 | Yellow | 10 | Violet | 11 | Rose | 12 | Aqua |
| 13 | Blue* | 14 | Orange* | 15 | Green* | 16 | Brown* | 17 | Grey* | 18 | White* |
| 19 | Red* | 20 | Nature | 21 | Yellow* | 22 | Violet* | 23 | Rose* | 24 | Aqua* |

* Black ring

Alternative tube and fibre colour code available on request

Loose Tube Fibre Optic Outdoor Cable

12 Element Dry Core Design

MiDia[®]200 Armour



Issue November 2023

according to **OFS FURUKAWA SOLUTIONS Generic Specification**

Sheath Marking

OFS OPTICAL CABLE MIDIA200 ARMOUR [ID] [MM/YYYY] [Handset Sign] xxxF [Meter Marking]

Alternative sheath printing available on request.

In case of order the exact sheath printing text will be clarified with the customer.

Mechanical Properties and Environmental Behaviour

Tests according to **IEC 60794**

| | Parameter | Requirement | Value |
|---|--------------------------------------|--|---|
| Tensile Performance: IEC 60794-1-21-E1A and E1B | Long term load | - No attenuation increase* - No fibre strain | Load: 1000 N |
| | Short term load, during installation | - No changes in attenuation before versus after load - Max. fibre strain 0.5% | Load: 1.5 x W <i>W is the weight of the cable in N</i> |
| Crush Performance: IEC 60794-1-21-E3A | Long term load | - No attenuation increase* | Load (Plate / Plate): 1000 N |
| | Short term load | - No changes in attenuation before versus after load - No damage** | Load (Plate / Plate): 3000 N |
| Bending Performance: IEC 60794-1-21-E11 | Handling fixed installed | - No attenuation increase* | Bend radius: 15x D |
| | During installation (under load) | - No changes in attenuation before versus after load | Bend radius: 20x D <i>D is the cable diameter</i> |
| Temperatures: IEC 60794-1-22-F1 | Operation | - No attenuation increase* | -40 to +70°C |
| | Installation | | -15 to +60°C |
| | Storage/Shipping | | -40 to +70°C |

*No changes in attenuation means that any changes in measurement value, either positive or negative within the uncertainty of measurement shall be ignored. The total uncertainty of measurement shall be less than or equal to 0.05 dB.

**Mechanical damage – when examined visually without magnification, there shall be no evidence of damage to the sheath. The imprint of plates will not be considered as damage.

Shipping Information

| Cable Length | Drum Dimensions (approx.) | | Shipping Weight (calc.) |
|--------------|---------------------------|---------|-------------------------|
| | Diameter | Width | Drum + Cable |
| 2000 m | 1400 mm | 780 mm | 570 Kg |
| 4000 m | 1550 mm | 1060 mm | 1090 Kg |
| 6000 m | 2000 mm | 1100 mm | 1790 Kg |

The shipping information are given for one-way reels. Reusable reels are available on request.

The information is believed to be accurate at time of issue.

OFS FURUKAWA SOLUTIONS reserves the right to improve, enhance and modify the features and specifications of OFS FURUKAWA SOLUTIONS products without prior notification. Please ensure you have the latest version of the data sheet. This data sheet is property of OFS FURUKAWA SOLUTIONS.

For additional information please contact your sales representative.

You can also visit our

website at <http://www.ofsoptics.com>.

Telephone: +49 (0) 228 7489 201

Email: cableinfo@ofsoptics.com

MiDia is a registered trademark of Fitel USA Corp.

