

# Loose Tube Fibre Optic Outdoor Cable

6 Element All Dielectric Dry Core Design


**MiDia® Micro GX**



FURUKAWA SOLUTIONS

Issue January 2024

according to OFS FURUKAWA SOLUTIONS Generic Specification

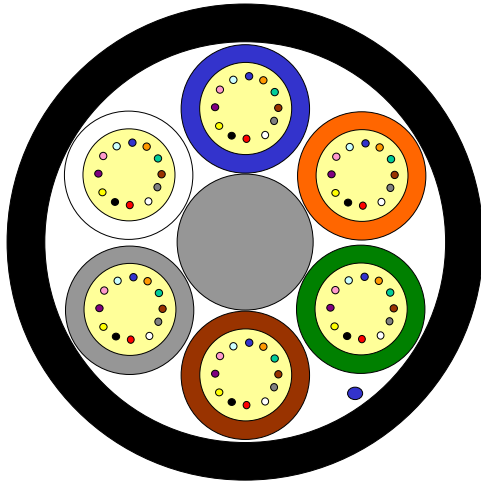

## Application

Air-Blown Installation into Micro-Ducts  
 Recommended duct size for optimized blowing performance: 8, 10 and 12 mm Inner Diameter  
 Pushforce [N]: 350 in 8 mm ID-Duct

Other combinations are possible, please contact us for more information. Distance achievable depends on route, equipment and quality of duct.

## Design

- Optical Fibres
- Non-metallic Central Member
- Gel-filled Buffer Tubes
- Ripcord
- PE-Jacket

## Features

- Small tubes for a reduced outer diameter
- Dry Core Design – Cable core water blocked by means of dry “water swellable” technology - for quicker, cleaner cable prep for jointing
- Individual coloured tubes

Version illustrated is the 72 Fibre Cable

Fibre Count	Tubes	Core Design	Outer Diameter [mm]	Cable Weight [kg/km]	AT-Code**
<b>12 Fibres per Tube</b>					
12	1	1+6 (5 Fillers*)	5.2	25	AT-[ ][ ][ ]453T-012
24	2	1+6 (4 Fillers*)	5.2	25	AT-[ ][ ][ ]453T-024
36	3	1+6 (3 Fillers*)	5.2	25	AT-[ ][ ][ ]453T-036
48	4	1+6 (2 Fillers*)	5.2	25	AT-[ ][ ][ ]453T-048
72	6	1+6	5.2	25	AT-[ ][ ][ ]453T-072

This table shows nominal diameter and weight values which may differ in shipments.

\* Fillers are natural coloured and evenly distributed over the positions

\*\* Please refer to the OFS FURUKAWA SOLUTIONS AT- Code. The blanks specify the fibre type.

## Identification

Tube and Fibre Colour Code:

1	Blue	2	Orange	3	Green	4	Brown	5	Grey	6	White
7	Red	8	Black	9	Yellow	10	Violet	11	Rose	12	Aqua

Alternative tube and fibre colour code available on request

# Loose Tube Fibre Optic Outdoor Cable

6 Element All Dielectric Dry Core Design

**MiDia® Micro GX**



FURUKAWA  
SOLUTIONS

Issue January 2024

according to OFS FURUKAWA SOLUTIONS Generic Specification

## Sheath Marking

**OFS OPTICAL CABLE MIDIA MICRO GX [ID] [MM/YYYY] [Handset Sign] xxxF [Meter Marking]**

Alternative sheath printing available on request. In case of order the exact sheath printing text will be clarified with the customer.

## Mechanical Properties and Environmental Behaviour

Tests according to IEC 60794

	Parameter	Requirement	Value
<b>Tensile Performance:</b>  IEC 60794-1-21-E1A and E1B	Long term load	- No attenuation increase*	Load: 300 N
	Short term load, during installation	- No changes in attenuation before versus after load - Max. fibre strain 0.6%	Load: 850 N
<b>Crush Performance:</b>  IEC 60794-1-21-E3A	Short term load	- No changes in attenuation before versus after load - No damage**	Load (Plate / Plate): 600 N
<b>Bending Performance:</b>  IEC 60794-1-21-E11	Handling fixed installed	- No attenuation increase*	Bend radius: 90 mm
	During installation (under Load)	- No changes in attenuation before versus after load	Bend radius: 180 mm
<b>Temperature Performance:</b>  IEC 60794-1-22-F1	Operation	Single-mode Fibres:	-40 to +70°C
	Installation	- No attenuation increase*	-15 to +40°C
	Storage/Shipping		-40 to +70°C
	Operation	Multimode Fibres:	-30 to +70°C
Installation	- No attenuation increase***	-15 to +40°C	
Storage/Shipping		-40 to +70°C	

\*No changes in attenuation means that any changes in measurement value, either positive or negative within the uncertainty of measurement shall be ignored. The total uncertainty of measurement shall be less than or equal to 0.05 dB or 0.05 dB/km.

\*\* Mechanical damage – when examined visually without magnification, there shall be no evidence of damage to the sheath. The imprint of plates will not be considered as damage.

\*\*\* No changes in attenuation means that any changes in measurement value, either positive or negative within the uncertainty of measurement shall be ignored. The maximal allowance for attenuation changes shall be less than or equal to +/- 0.2 dB/km for 90 % and +/- 0.3 dB/km for 100 % of the fibres

## Shipping Information

Cable Length	Drum Dimensions (approx.)		Shipping Weight (calc.)
	Diameter	Width	Cable + Drum
2000 m	1000 mm	780 mm	100 kg
4000 m	1000 mm	780 mm	150 kg
6000 m	1000 mm	780 mm	200 kg
8000 m	1000 mm	780 mm	250 kg

The shipping information are given for one-way reels. Reusable reels are available on request.

The information is believed to be accurate at time of issue.

OFS FURUKAWA SOLUTIONS reserves the right to improve, enhance and modify the features and specifications of OFS FURUKAWA SOLUTIONS products without prior notification.

Please ensure you have the latest version of the data sheet.

This data sheet is property of OFS FURUKAWA SOLUTIONS

For additional information please contact your sales representative.

You can also visit our website at <http://www.ofsoptics.com>.

Email: [cableinfo@ofsoptics.com](mailto:cableinfo@ofsoptics.com)



MiDia is a registered trademark of OFS Fitel, LLC.