

# Loose Tube Fibre Optic Outdoor Cable

6 Element Dry Core Design


**MiDia<sup>®200</sup> Light Armour**



FURUKAWA  
SOLUTIONS

Issue February 2024

according to **OFS FURUKAWA SOLUTIONS Generic Specification**

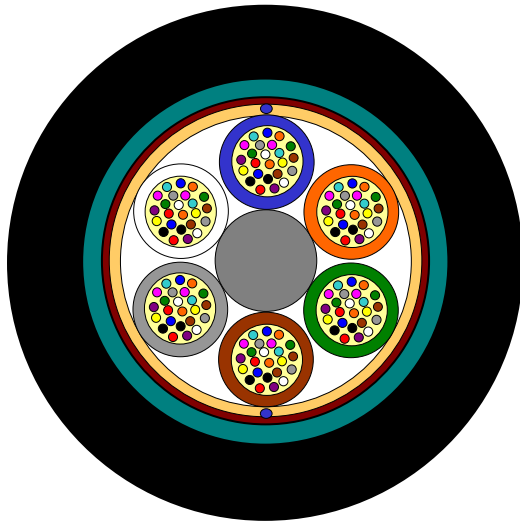

### Application

Mainly used for direct burial and for Duct-Installation (HD-PE Tubes) by Cable Pulling

### Design

- Optical Fibres 200 µm
- Gel-filled Buffer Tubes
- Non-metallic Central Member
- Water Blocking Material
- Non-metallic Strength Elements
- Corrugated Steel Tape
- Ripcord
- PE-Jacket

### Features

- Light Armour Cable – ideal rodent protection
- Small tubes for a reduced outer diameter
- Dry Core Design – Cable core water blocked by means of dry “water swellable” technology - for quicker, cleaner cable prep for jointing
- Individual coloured tubes

Version illustrated is the 144 Fibre Cable

Fibre Count	Tubes	Core Design	Outer Diameter [mm]	Cable Weight [kg/km]	Standard Length [m]	AT-Code**
96	4 (24F)	1+6 (2 Fillers*)	11.2	125	2000 / 4000 / 6000 / 8000	AT-[ ][ ] H6CF-096
144	6 (24F)	1+6	11.2	125	2000 / 4000 / 6000 / 8000	AT-[ ][ ] H6CF-144

This table shows nominal diameter and weight values which may differ in shipments.

\*Fillers are natural coloured and evenly distributed over the positions.

\*\*Please refer to the OFS FUFUKAWA SOLUTIONS AT- Code. The blanks specify the fibre type.

## Identification

### Tube Colour Code:

1	Blue	2	Orange	3	Green	4	Brown	5	Grey	6	White
---	------	---	--------	---	-------	---	-------	---	------	---	-------

### Fibre Colour Code:

1	Blue	2	Orange	3	Green	4	Brown	5	Grey	6	White
7	Red	8	Black	9	Yellow	10	Violet	11	Rose	12	Aqua
13	Blue*	14	Orange*	15	Green*	16	Brown*	17	Grey*	18	White*
19	Red*	20	Nature	21	Yellow*	22	Violet*	23	Rose*	24	Aqua*

\* Black ring

Alternative tube and fibre colour code available on request

## Sheath Marking

**OFS OPTICAL CABLE MIDIA200 LIGHT ARMOUR [ID] [MM/YYYY] [Handset Sign] xxxF [Meter Marking]**

Alternative sheath printing available on request. In case of order the exact sheath printing text will be clarified with the customer.

# Loose Tube Fibre Optic Outdoor Cable

6 Element Dry Core Design

**MiDia<sup>®200</sup> Light Armour**



FURUKAWA  
SOLUTIONS

Issue February 2024

according to OFS FURUKAWA SOLUTIONS Generic Specification

## Mechanical Properties and Environmental Behaviour

Tests according to IEC 60794

	Parameter	Requirement	Value
<b>Tensile Performance:</b> IEC 60794-1-21-E1A and E1B	Long term load	- No attenuation increase* - No fibre strain	Load: 500 N
	Short term load, during installation	- No changes in attenuation before versus after load - Max. fibre strain 0.33%	Load: 2.0 x W <i>W is the weight of the cable in N</i>
<b>Crush Performance:</b> IEC 60794-1-21-E3A	Long term load	- No attenuation increase*	Load (Plate / Plate): 1500 N
	Short term load	- No changes in attenuation before versus after load - No damage**	Load (Plate / Plate): 3000 N
<b>Bending Performance:</b> IEC 60794-1-21-E11	Handling fixed installed	- No attenuation increase*	Bend radius: 15 x D
	During installation (under Load)	- No changes in attenuation before versus after load	Bend radius: 20 x D <i>D is cable diameter</i>
<b>Temperature Performance:</b> IEC 60794-1-22-F1	Operation	- No attenuation increase*	-40 to +70°C
	Installation		-15 to +60°C
	Storage/Shipping		-40 to +70°C

\*No changes in attenuation means that any changes in measurement value, either positive or negative within the uncertainty of measurement shall be ignored. The total uncertainty of measurement shall be less than or equal to 0.05 dB.

\*\*Mechanical damage – when examined visually without magnification, there shall be no evidence of damage to the sheath. The imprint of plates will not be considered as damage.

## Shipping Information

Cable Length	Drum Dimensions (approx.)		Shipping Weight (calc.)
	Diameter	Width	Cable + Drum
2000 m	1000 mm	780 mm	300 Kg
4000 m	1400 mm	780 mm	590 Kg
6000 m	1550 mm	1060 mm	880 Kg
8000 m	1550 mm	1060 mm	1130 Kg

The shipping information are given for one-way reels. Reusable reels are available on request.

The information is believed to be accurate at time of issue.

OFS FURUKAWA SOLUTIONS reserves the right to improve, enhance and modify the features and specifications of OFS FURUKAWA SOLUTIONS products without prior notification.

Please ensure you have the latest version of the data sheet.

This data sheet is property of OFS FURUKAWA SOLUTIONS

For additional information please contact your sales representative.

You can also visit our website at <http://www.ofsoptics.com>.

Email: [cableinfo@ofsoptics.com](mailto:cableinfo@ofsoptics.com)



MiDia is a registered trademark of Fitel USA Corp