




A Furukawa Company

2-Fiber 2.5 mm HCS[®] Step-Index Fiber Optic Cable

P/N: AC02602-10

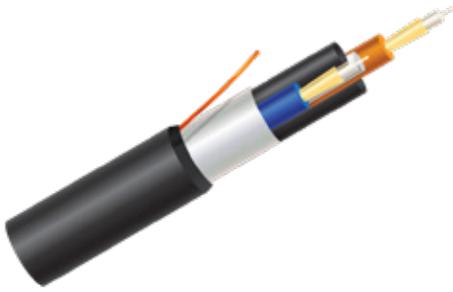

Overview

These cables are designed for industrial data communication applications in challenging environments. They are extremely durable, with outstanding crush and impact resistance. With excellent weatherability, they are UV- and chemical-resistant, moisture-resistant, and suitable for damp environments.

Taking advantage of the features of HCS optical fibers, these tight buffer cables are surrounded by high strength aramid yarn and a tough polyethylene jacket.

Typical Applications

Factory Automation

Fuel Cells

Industrial Communications

Sensing

Short-Haul Data Transmission
in Harsh/Wet Environments

Utilities

Wind Turbines



A Furukawa Company

2-Fiber 2.5 mm 200 μm HCS® Step-Index Fiber Optic Cable

P/N: AC02602-10

Product Specifications	
Product Description	2-Fiber 2.5 mm 200 μm HCS Step-Index Fiber Optic Cable
Physical Characteristics	
Construction	2-Fiber
Fiber Core Diameter	200 ± 4 μm
Sub-Unit Diameter	2.5 ± 0.2 μm
Outer Cable Diameter	8.0 mm
Cable Weight	45.0 kg/km
Outer Jacket Material	PE
Outer Jacket Color	Black
Numerical Aperture	0.37
Crimp & Cleave Compatibility	SMA and ST Connectors
Optical Characteristics	
Type	Multimode Step-Index
Attenuation @ 850 nm	≤ 6 dB/km
Fiber Specifications	CF01493-10, 200 μm HCS 0.37 NA Low OH Optical Fiber
Mechanical and Environmental	
Installation Load (Maximum)	310 lb. (1375 N)
Operating Load (Maximum)	155 lb. (689 N)
Minimum Bend Installation	120 mm
Minimum Bend Operating	80 mm
Operating Temperature	-40 to +80 °C
Storage Temperature	-40 to +80 °C
Intended Location	Outdoor
Order by Part Number	AC02602-10
Product Description Code	HCP-M0200T-A02EB
OPTIONS: Also available in breakout construction with up to 18 sub-units, inner/outer jacket color, outer jacket material, print legend, terminated assemblies	

For additional information please contact your sales representative.

You can also visit our website at www.ofsoptics.com or call 1-888-fiberhelp (1-888-342-3743) USA or 1-770-798-5555 outside the USA.



Copyright © 2019 OFS Fitel, LLC. All rights reserved, printed in USA.

OFS Marketing Communications
Date: 12/19

HCS is a registered trademark of OFS Fitel, LLC. Avago is a registered trademark of Broadcom. OFS reserves the right to make changes to the prices and product(s) described in this document at any time without notice. This document is for informational purposes only and is not intended to modify or supplement any OFS warranties or specifications relating to any of its products or services.