




A Furukawa Company

AccuRiser™ Rollable Ribbon Fiber Optic Cable

Innovative Indoor/Outdoor Cable Offers High Fiber Density and Flexibility for Data Center Applications

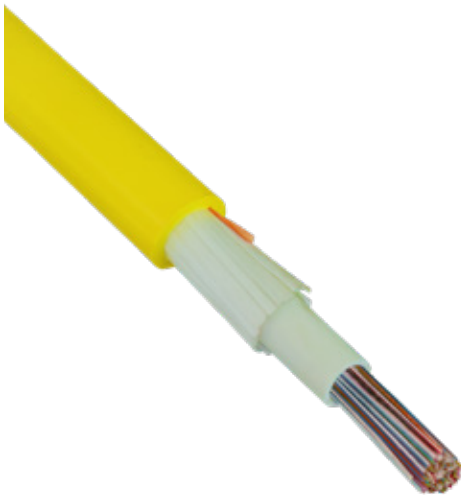

AccuRiser Rollable Ribbon Cable

Features

- OFS rollable ribbon technology
- Compact, flexible design
- Indoor/outdoor rated
- Highly crush-resistant central core
- Low Smoke/Zero Halogen (LSZH) materials
- Dual Flame Rating (OFNR and CPR rated)
- Complies with ICEA-S-696 Standard
- Fiber counts of 144 to 864
- Excellent water-penetration resistance

Benefits

- Rollable ribbons help enable smaller cable outer diameter (OD) and reduced weight versus traditional ribbon cable designs
- Optimized for fast, cost-effective mass fusion splicing
- Dual flame rating promotes global use and reduces regional code selection issues
- High fiber density helps save on valuable space
- Cable flexibility simplifies handling and installation

Product Description


The AccuRiser Rollable Ribbon (RR) Cable was specifically designed to offer high fiber density and excellent carrying capacity. This compact cable features rollable ribbons, OFS' newest optical fiber ribbon design. These ribbons help enable highly efficient ribbon splicing and easy individual fiber breakout. This ribbon design may also be "rolled" (compacted) and routed like individual fibers to facilitate use in smaller closures and splice trays.

Why the AccuRiser Rollable Ribbon Cable?

Every element of the AccuRiser Rollable Ribbon Cable was designed to offer high fiber density while helping to speed installation during a new data center or central office deployment. The 12-fiber rollable ribbons allow splice-in-place operations that help to get a facility up and running quickly. This strong yet flexible cable helps to ease cable installation over ladder racking and through tight bends during routing as well as smoothing and speeding installation. The compact design also improves ladder rack utilization (more cables in the same space).

The AccuRiser Rollable Ribbon Cable is an excellent choice for building-to-building cable connections. This cable also removes the need for intermediate splice points for transitions from the outdoor environment to indoor use. Reducing the number of splices can help result in improved system loss and lower termination points within a network.

The cable is also well suited for routing for terminations and frames as well as preconnectorized applications.

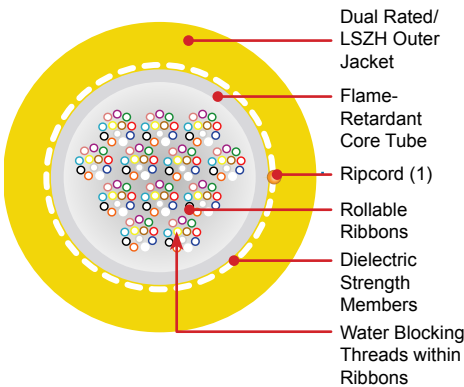

AccuRiser Rollable Ribbon Cable Cross-Section

Specifications	8RIO	8RIO	8RIO	8RIO	8RIO
Fiber Count	144	288	432	576	864
Cable Outer Diameter - in. (mm)	0.41 (10.5)	0.49 (12.5)	0.61 (15.5)	0.67 (17)	0.77 (19.5)
Cable Weight - lb/kft (kgm/km)	82 (122)	113 (168)	171 (254)	190 (283)	244 (363)
Maximum Tensile Rating - lb (N)	600 (2670)	600 (2670)	600 (2670)	600 (2670)	600 (2670)
Minimum Bend Diameter/ Static Condition Unload (Installed) - in. (mm)	6 (153)	6 (153)	8 (204)	10 (254)	12 (305)
Dynamic Condition/ Loaded (During Installation) 40 x OD - in. (mm)	17 (432)	20 (508)	24.4 (620)	26.8 (681)	30.8 (783)
Storage Coil 40 x OD - in. (mm)	17 (432)	20 (508)	24.4 (620)	26.8 (681)	30.8 (783)
CPR Rating	B2ca-s1a, d0, a1	Cca-s1a, d0, a1	Cca-s1a, d0, a1	Cca-s1b, d0, a1	Cca-s1b, d0, a1
DoP Lookup: www.ofs-sales.com/cpr/	8RIO-144-A-D	8RIO-288-A-D	8RIO-432-A-D	8RIO-576-A-D	8RIO-864-A-D

Performance Standard

The AccuRiser Rollable Ribbon Cable meets all or portions of Telcordia GR-409/ICEA-S-83-696/ICEA-S-104-696/ICEA-S-115-730 and TIA-568. Riser-rated cables are UL® listed as compliant with NEC® Article 770 as type OFNR.

Handling

Temperature: Installation: -4 °F to 140 °F (-20 °C to 60 °C)
 Operation: -40 °F to 158 °F (-40 °C to 70 °C)
 Storage: -40 °F to 158 °F (-40 °C to 70 °C)

AccuRiser Rollable Ribbon Cable Ordering Information	
Example: 8RIO-288A-WDK-4 ¹	
Part Number: 8RIO - <u>NNN</u> A - <u>W</u> <u>X</u> <u>Y</u> - <u>Z</u>	
8RIO	AccuRiser Rollable Ribbon Indoor/Outdoor Cable
NNN	Fiber Count 144, 288, 432, 576, or 864
A	Initial Release Version
W	Fiber Type (see chart)
X	Jacket Type (flame retardant) D = Dual-Rated Low Smoke/Zero Halogen (UL 1666 and CPR rated)
Y	Jacket Color ² K = Black Y = Yellow T = Black with two yellow stripes
Z	Maximum Cable Attenuation (see chart)

Fiber Type	
Code	Description
A	AllWave®+ ZWP Bend-Optimized Single-Mode Optical Fiber (G.657.A1)
W	AllWave FLEX+ ZWP Bend-Optimized Single-Mode Optical Fiber (G.657.A2)

Maximum Cable Attenuation			
Single-Mode Optical Fiber (dB/km)	1310 nm	1550 nm	MCA (Z)
AllWave+ ZWP Bend-Optimized Single-Mode Optical Fiber (G.657.A1)	0.5	0.5	5
AllWave FLEX+ ZWP Bend-Optimized Single-Mode Optical Fiber (G.657.A2)	0.4	0.3	4

* **NOTE:** Installed attenuation values shall be at or below those listed above.

¹ Part Number shown is for an AccuRiser Rollable Ribbon Indoor/Outdoor Cable with 288 AllWave+ ZWP Fibers and standard cable print.
OFS G.657.A1 I/O OPTICAL CABLE -C- 8RIO-288A-WDK-4 OFNG-ST1 FT4 c (UL) OFNR-LS LSZH CPR [MM/YY] [LOT NO] [LENGTH IN FEET]

² Contact OFS Order Management for information on other cable variations, including fiber types, attenuation, and custom cable print

For additional information please contact your sales representative.

You can also visit our website at www.ofsoptics.com or call 1-888-fiberhelp (1-888-342-3743) USA or 1-770-798-5555 outside the USA.



Copyright © 2020 OFS Fitel, LLC.
 All rights reserved, printed in USA.

OFS Marketing Communications
 Doc ID: prem-240 Date: 07/20



AllWave and EZ-Bend are registered trademarks and AccuRiser is a trademark of OFS FITEL, LLC. OFS reserves the right to make changes to the prices and product(s) described in this document at any time without notice. This document is for informational purposes only and is not intended to modify or supplement any OFS warranties or specifications relating to any of its products or services.