




A Furukawa Company

## Zipcord 200 $\mu$ m 2.5 mm LSZH HCS<sup>®</sup> Fiber Optic Cable

P/N: C21051

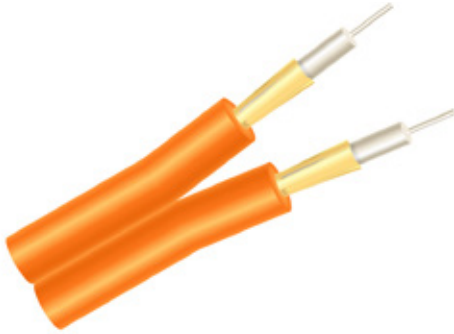

### Overview

Designed specifically for indoor use, these simplex and zipcord designs with 2.25 mm outer jackets are constructed with low smoke zero halogen (LSZH) cable materials from HCS fibers. They are appropriate for indoor riser installations in enclosed or sealed locations. These cables are crimp and cleave compatible with ST or SMA connectors. LSZH materials also offer a higher operating temperature range than comparable HCS cables.

### Typical Applications

Nuclear Power Plants  
Offshore Marine Platforms  
Shipboard Systems



A Furukawa Company

# Zipcord 200 µm 2.5 mm LSZH HCS® Fiber Optic Cable

P/N: C21051

Product Specifications	
Product Description	Zipcord 200 µm 2.5 mm LSZH HCS Fiber Optic Cable
Physical Characteristics	
Construction	Zipcord
Fiber Core Diameter	200 ± 4 µm
Sub-Unit Diameter	2.5 ± 0.2 mm
Outer Cable Diameter	2.5 x 5.2 mm
Cable Weight	< 14.0 kg/km
Outer Jacket Material	LSZH
Outer Jacket Color	Orange
Specialty Testing (IEC 754-2 Acid Gas - Halogen Content)	Passes
Specialty Testing (IEC 332-3 Flammability Rating)	Passes
Specialty Testing (Cyclic Flexing)	> 50,000 Cycles
Crimp & Cleave Compatibility	SMA and ST Connectors
Optical Characteristics	
Type	Multimode Step-Index
Attenuation @ 850 nm	≤ 6 dB/km
Mechanical and Environmental	
Installation Load (Maximum)	165 lb. (734 N)
Operating Load (Maximum)	85 lb. (378 N)
Minimum Bend Installation	38 mm
Minimum Bend Operating	25 mm
Operating Temperature	-20 to +80 °C
Storage Temperature	-40 to +80 °C
Intended Location	Indoor
Order by Part Number	<b>C21051</b>
Product Description Code	HCP-M0200T-A02ZZ

**OPTIONS:** Also available in breakout construction with up to 18 sub-units, jacket color, outer jacket material, print legend, terminated assemblies

**NOTE:** The operating temperature ranges are general guidelines. Consult with our Technical Sales department to determine the optimal coating and jacketing material for your specific application. 1.860.678.6636.

**For additional information please contact your sales representative.**

You can also visit our website at [www.ofsoptics.com](http://www.ofsoptics.com) or call 1-888-fiberhelp (1-888-342-3743) USA or 1-770-798-5555 outside the USA.



Copyright © 2019 OFS Fitel, LLC. All rights reserved, printed in USA.

OFS Marketing Communications  
Date: 12/19



HCS is a registered trademark of OFS Fitel, LLC. OFS reserves the right to make changes to the prices and product(s) described in this document at any time without notice. This document is for informational purposes only and is not intended to modify or supplement any OFS warranties or specifications relating to any of its products or services.