


2-Fiber Waterblocked 200 μm LSZH Step-Index HCS[®] Fiber Optic Cable

P/N: C21052

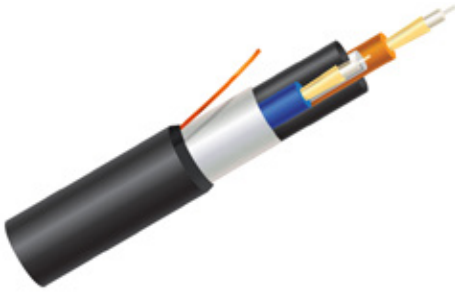

Overview

These versatile low smoke zero halogen (LSZH) 2.5 mm cables, based on HCS fiber, have a broader range of installation environments than either indoor or outdoor cable. LSZH construction makes them suitable for indoor riser installations in enclosed or sealed locations. They are also sufficiently insulated to endure the transition areas from the indoors to the outdoors, such as at electrical substations, or poorly insulated semi-outdoor locations, such as wind turbine towers. These cables are crimp and cleave compatible with ST or SMA connectors. They are moisture and fatigue resistant and extremely durable. LSZH materials also offer a higher operating temperature range than comparable HCS cables.

Typical Applications

Nuclear Power Plants
Offshore Marine Platforms
Shipboard Systems
Wind Turbines



A Furukawa Company

2-Fiber Waterblocked 200 μm LSZH Step-Index HCS® Fiber Optic Cable

P/N: C21052

Product Specifications	
Product Description	2-Fiber Waterblocked 200 μm LSZH Step-Index HCS Fiber Optic Cable
Physical Characteristics	
Construction	2-Fiber Waterblocked
Fiber Core Diameter	200 ± 4 μm
Sub-Unit Diameter	2.5 ± 0.2 mm
Outer Cable Diameter	8.0 ± 0.4 mm
Cable Weight	< 65 kg/km
Outer Jacket Material	LSZH
Outer Jacket Color	Black
Specialty Testing (IEC 754-2 Acid Gas - Halogen Content)	Passes
Specialty Testing (IEC 332-3 Flammability Rating)	Passes
Specialty Testing (Cyclic Flexing)	> 500 Cycles
Crimp & Cleave Compatibility	SMA and ST Connectors
Optical Characteristics	
Type	Multimode Step-Index
Attenuation @ 850 nm	≤ 8 dB/km
Mechanical and Environmental	
Installation Load (Maximum)	310 lb. (1375 N)
Operating Load (Maximum)	155 lb. (689 N)
Minimum Bend Installation	120 mm
Minimum Bend Operating	80 mm
Operating Temperature	-20 to +80 °C
Storage Temperature	-40 to +80 °C
Intended Location	Indoor/Outdoor
Order by Part Number	C21052
Product Description Code	HCP-M0200T-A02ZB Waterblocked
OPTIONS: Also available in breakout construction with up to 18 sub-units, jacket color, outer jacket material, print legend, terminated assemblies	
NOTE: The operating temperature ranges are general guidelines. Consult with our Technical Sales department to determine the optimal coating and jacketing material for your specific application. 1.860.678.6636.	

For additional information please contact your sales representative.

You can also visit our website at www.ofsoptics.com or call 1-888-fiberhelp (1-888-342-3743) USA or 1-770-798-5555 outside the USA.



Copyright © 2019 OFS Fitel, LLC. All rights reserved, printed in USA.

OFS Marketing Communications
Date: 12/19



HCS is a registered trademark of OFS Fitel, LLC. OFS reserves the right to make changes to the prices and product(s) described in this document at any time without notice. This document is for informational purposes only and is not intended to modify or supplement any OFS warranties or specifications relating to any of its products or services.