


Mini C2™ DT Cable - Totally Gel Free


Lose the Gel with Completely Gel-Free, Compact Fiber Optic Cable for Faster, Cleaner Deployments

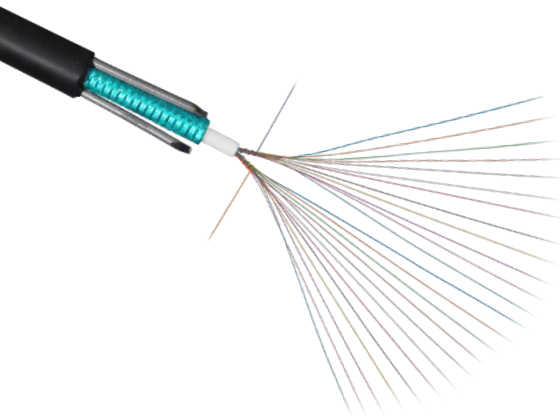


Mini C2 DT Fiber Optic Cable

Mini C2 DT Fiber Optic Cable Cross-Section

12-Fiber Cable

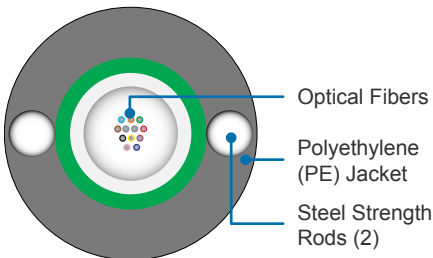

24-Fiber Cable

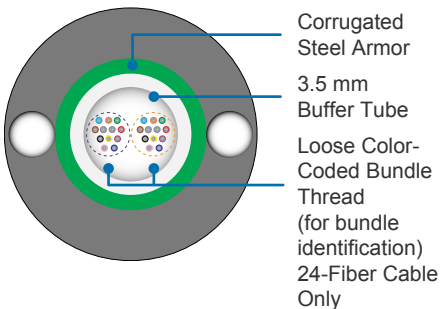

Features and Benefits

- Optimized for optical fiber counts up to 24 for reduced deployment costs
- Totally gel-free fiber optic cable design for cleaner, faster installations
- Compact size facilitates more efficient duct utilization
- Steel strength rods allow ease of location following installation
- 600-pound (2700 N) Maximum Rated Cable Load (MRCL)
- Flexible 3.5 mm central tube routes easily into pedestals and closures
- RDUP (formerly RUS) listed; complies with Telcordia Technologies GR-20 specifications for reliable performance
- Available with OFS application-specific optical fibers, including AllWave® Zero Water Peak (ZWP) and AllWave+ ZWP Single-Mode and AllWave FLEX Optical Fiber

Product Description

The OFS Mini C2 DT Cable offers a compact, yet durable fiber optic cable solution in a completely gel-free design that is easy to handle and install. The core of this fiber optic cable contains no messy filling compounds, thereby eliminating the costly labor of removing gel from each optical fiber prior to splicing and helping keep your tools and workspace clean and safe.

The construction of the Mini C2 DT Cable begins by placing either 4, 12, or 24 optical fibers within a flexible, 3.5 mm dry central tube (for counts greater than 12, fibers are separated by loose polyester binder threads). Drop cable lengths are standardized offerings available in 5,000/10,000/or 20,000 ft. cable lengths. An overlapping layer of electrolytically chrome-coated corrugated steel (ECCS) armor then envelops the central tube. The inner surface of the ECCS armor is coated with a gel-free, super-absorbent, water-blocking powder that provides outstanding water penetration resistance “on demand”. Two steel strength rods are then placed lengthwise along the armor (diametrically positioned to each other) to provide additional tensile strength. Finally, a durable polyethylene (PE) jacket is applied to help provide protection in the rigorous outside plant (OSP) environment.

Why The Mini C2 DT Cable?

The small size and light weight of the Mini C2 DT Cable offer a more cost-effective, efficient solution for the smaller fiber counts that are needed in the last optical link of your network.

This cable’s innovative gel-free design features no messy filling compounds, virtually eliminating the need for cleaning chemicals and wipes and enabling faster and cleaner OSP installation with almost effortless splice preparation. The Mini C2 DT Cable’s totally gel-free construction also creates a more compact, lighter weight cable that is easier to handle and install and that helps save on cable storage space and shipping. By reducing transportation costs and the use of chemical cleaning supplies, this cable offers a more cost-effective, eco-friendly solution. The Mini C2 DT cable is suitable for underground conduit, direct buried, and aerial lashed applications.

* Please review OFS Installation Procedure # 038 for cable placement recommendations.

Specifications	
Fiber Count:	4, 12, or 24
Outer Diameter - in. (mm)	0.38 (9.7)
Weight - lb/kft (kgm/km)	73 (109)
Performance Standard	
Tested per Applicable Requirements of ANSI/ICEA S-87-640 and Telcordia GR-20 CORE, Issue 4	
Handling	
Minimum Bend Radius, With Load	15 x OD*
Minimum Bend Radius, With No Load	10 x OD*
Minimum Bend Radius, Storage Coils	10 x OD*
Maximum Rated Cable Load (MRCL):	600 lbf (2700 N)
Maximum Long Term Load:	180 lbf (800 N)
* NOTE: OD = Outer Diameter of Cable	

Temperature: Installation: -22 °F to 140 °F (-30 °C to 60 °C)
 Operation: -76 °F to 158 °F (-60 °C to 70 °C)
 Storage: -40 °F to 167 °F (-40 °C to 75 °C)

Fiber Type ²							
Single-Mode Fiber	Fiber (S1)	Fiber (S2)	Fiber (SF)	Fiber Standards	Wavelengths (nm)	Typical * Attenuation (dB/km)	Maximum Cable on Reel Attenuation (dB/km)
AllWave+ ZWP Fiber	3	C	E	G.652.D/G.657.A1	1310/1385/1550	-	0.35/0.31/0.25

Mini C2 DT Cable Ordering Information		NOTE: Cables must be ordered in lengths of 5 kft/ 10 kft/ 20 kft	
Example: AT-3CEQ2QT-NNN ¹	Part Number: AT- S1 S2 SF S3 S4 S5 S6 - NNN	NOTE: Only available fiber counts are 4, 12, or 24	
S1 = Fiber Selection See S1 in Fiber Type table above	S3 = Sheath Construction Q = Mini C2 DT	S5 = Core Type Q = Totally Gel-Free Tube (3.5 mm tube)	
S2 = Fiber Transmission Performance See S2 in Fiber Type table above	S4 = Tensile Load 2 = 600 lb. (2700 N)	S6 = Fibers per Tube T = 12 fibers (per bundle)	
SF = Fiber Type² See SF in Fiber Type table above	NNN = Fiber Count = 4, 12, or 24		

¹ Part Number shown is for a Mini C2 DT Cable with standard AllWave ZWP attenuation and standard cable print. Maximum AllWave ZWP attenuation: 0.35/0.31/0.27/0.25/0.27 dB/km @ 1310/1385/1490/1550/1625 nm
 Standard Print, example for Mini C2 DT Cable: OFS OPTICAL CABLE AT-3CEQ2QT-NNN [MM-YY] (UL) US TYPE OFNR [HANDSET SYMBOL] [NNN] F [SERIAL #]

² Contact OFS Order Management for information on other cable variations, including additional fiber types, attenuation, and custom cable print.
NOTE: For more information regarding typical attenuation as well as attenuation parameters on Link Design Value (LDV) (Maximum end-to-end attenuation over a concatenated span), please see OFS Application Note AN-111 which can be downloaded at www.ofsoptics.com or contact your OFS representative.

For additional information please contact your sales representative.
 You can also visit our website at www.ofsoptics.com or call 1-888-fiberhelp (1-888-342-3743) USA or 1-770-798-5555 outside the USA.