

## SlimBox® Inline Facade Enclosure



External View



Internal View

### Features and Benefits

- Protection level up to IP55 or greater
- Wall-mount inline enclosure to support customer drops at multi-dwelling units (MDUs) or multi-business locations. Additional usage as a branching or emergency restoration enclosure.
- Supports 2 SCA adapters or LC duplex adapters
- Up to 4 drops ports on each side (2 external and 2 internal/through wall) to support a variety of configurations
- Optional splice holders to support up to 24 fusion splices
- Supports round (3 to 6 mm OD) and flat (6x3 mm or 8x4 mm) drops

### Product Description

The SlimBox Inline Facade Enclosure is an excellent choice as an external demarcation closure for FTTx applications, featuring dual functionality as a connector and/or splice housing.

Designed for inline applications, feeder cables can enter the left or right side of the unit, 1 or more fibers can be dropped off, and the feeder cable can then exit the other side and continue running across the facade.

Feeder cables can be spliced to a pigtail or connectorize with a splice-on connector and connected for ready use. Drop cables can enter on either side of the closure when customer activation is required. A lanyard attaches to keep the cover with the closure during connection of the drops, even when mounted on the facade.

If needed, the Inline Facade enclosure can act as a splice box for branching of feeder cables, and the unit can store over 6 meters of 3 mm cable to support maintenance or emergency restoration.




A Furukawa Company

## SlimBox® Inline Facade Enclosure

### Product Characteristics

<b>Connector Ports</b>	Up to 2 SC or 2 LC duplex adapters
<b>Dimensions (W x H x D)</b>	180 mm x 92 mm 37.5 mm 7.09 in x 3.62 in x 1.48 in
<b>Installation</b>	Wall mount
<b>Splicing Capability</b>	Yes, splice tray for 6 splices with 2 adapters. Up to 24 total splice capacity with additional splice holders
<b>Material</b>	Plastic (PC+ABS)
<b>Operating Temperature</b>	-40 °F to 140 °F (-40 °C to 60 °C)

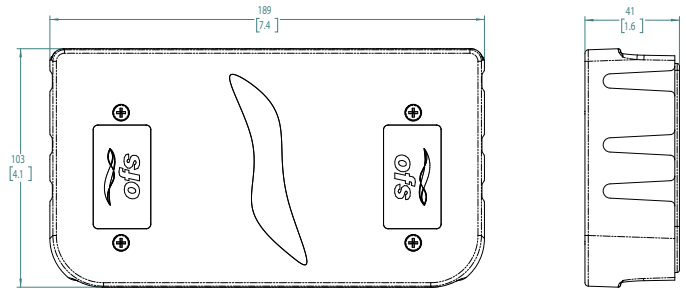

### Ordering Information

Comcode	Product Code	Description
301172433	NVSLGHTFIO-INLINE MODULE 2 SCAADPT-02PT	SlimBox Inline Facade Enclosure, 2 SCA adapters, 2 SCA Pigtails
301172276	NVSLGHTFIO-INLINE MODULE 2 LCAADPT-04PT	SlimBox Inline Facade Enclosure, 2 LCA duplex adapters, 4 LCA Pigtails



For additional information please contact your sales representative.

You can also visit our website at [www.ofsoptics.com](http://www.ofsoptics.com) or call 1-888-fiberhelp (1-888-342-3743) USA or 1-770-798-5555 outside the USA.



Copyright © 2022 OFS Fitel, LLC.  
All rights reserved, printed in USA.

OFS Marketing Communications  
DOC ID: fap-408 Date: 09/22

For a full list of our certifications, visit our website.



SlimBox is a registered trademark of OFS Fitel, LLC.  
OFS reserves the right to make changes to the prices and product(s) described in this document at any time without notice. This document is for informational purposes only and is not intended to modify or supplement any OFS warranties or specifications relating to any of its products or services.