




A Furukawa Company

LaserWave® WideBand (OM5) Optical Fiber

OM5 multimode fiber optimized for short wavelength division multiplexing (SWDM) applications

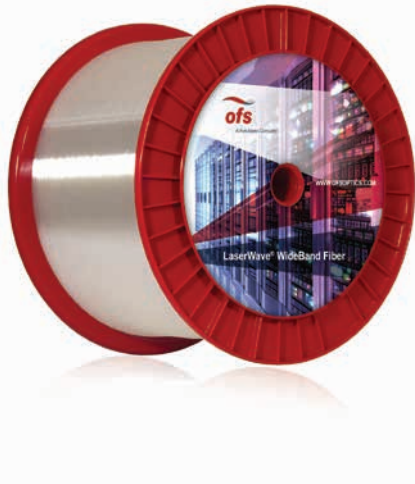

Features

- Meets ANSI/TIA 492AAAF and IEC 60793-2-10 standards for A1-OM5 wideband fiber
- Designed for SWDM and BiDi applications (850 nm to 950 nm)
- Uses SWDM to increase transmission capacity by up to 400%
- Manufactured using the industry's tightest geometric control
- Completely backward compatible with existing OM4 networks and applications

Benefits

- Supports today's applications including 100/200/400 Gb/s Ethernet and 32/64 GFC
- Ready for next-generation wideband networks
- Optimized for 100 Gb/s duplex (two fiber) transmission using BiDi and SWDM4 applications
- Supports 400 Gb/s transmission over 8-fiber links

Applications

LaserWave WideBand Multimode Fiber provides outstanding performance for fiber management systems in:

- Data centers
- High-performance computing centers
- Enterprise local area networks
- Storage area networks
- Central offices

Overview

LaserWave WideBand (OM5) Multimode Fiber is a 50 micron (μm) laser-optimized multimode fiber designed to help meet the demanding requirements of today's 850 nm based networks, as well as next-generation multimode short wavelength division multiplexing (SWDM) applications.

LaserWave WideBand fiber is designed to support light traveling at multiple wavelengths from 850 nm to 953 nm, unlike OM3 and OM4 fibers that are optimized for single wavelength, 850 nm operation. Using two wavelengths in Bi-Directional (BiDi) transmission, information carrying capacity can be doubled. Using four wavelengths in SWDM4 transmission can increase capacity by 4x. OM5 fiber maximizes the reach of multi-wavelength solutions.

Building on the history of LaserWave *FLEX 550* (OM4) Fiber, LaserWave WideBand Fiber meets and exceeds ANSI/TIA 492AAAF and IEC 60793-2-10 requirements for wideband fiber while maintaining backward compatibility with OM4 specifications. This fiber is designed to support duplex (two-fiber) 100 Gb/s Ethernet applications, and the new 400Gb/s Ethernet standard, 400GBASE-SR4.2.

Using state of the art process control, OFS LaserWave fiber is manufactured to the tightest geometry and optical specifications in the industry. Tighter specifications lead to lower variation when mating fiber optic connectors and lower insertion loss. Today's high speed 100 and 400Gb/s applications have extremely low loss budgets, and low connector loss and fiber attenuation is key to supporting these links. LaserWave WideBand Fiber offers low bending loss throughout the entire operating window, while maintaining excellent long-term fiber strength and reliability.



A Furukawa Company

Product Specifications

Physical Characteristics

Core Diameter	50 ± 2.5 µm
Core Non-Circularity	≤ 2.5 %
Clad Diameter	125 ± 0.7 µm
Clad Non-Circularity	≤ 0.7 %
Core/Clad Concentricity Error (Offset)	≤ 0.7 µm
Coating Diameter	242 ± 5 µm
Coating Non-Circularity	≤ 5 %
Coating-Clad Concentricity Error (Offset)	≤ 10 µm
Tensile Proof Test	100 kpsi (0.69 GPa)
Coating Strip Force	Range: 0.22 - 2.0 lbf (1.0 - 8.9 N) Typical: 0.6 lbf (2.7 N)
Standard Reel Lengths	2.2 – 8.8 km

Optical Characteristics

Attenuation

at 850 nm	≤ 2.2 dB/km
at 953 nm	≤ 1.7 dB/km
at 1300 nm	≤ 0.6 dB/km

Laser Bandwidth/EMB

See Transmission Characteristics Table

Transmission Distance (Link Length) Support

See Applications Support Table

Attenuation at 1380 nm minus attenuation at 1300 nm	≤ 1.0 dB/km
---	-------------

Attenuation Uniformity / Point Discontinuities at 850 nm and 1300 nm

≤ 0.08 dB

Numerical Aperture	0.200 ± 0.010
--------------------	---------------

Chromatic Dispersion

Zero Dispersion Wavelength (λ_0)

1297 ≤ λ_0 ≤ 1328 nm

Zero Dispersion Slope (S_0)

$S_0 \leq 4(-103)/(840(1-(\lambda_0/840)^4))$ ps/nm²km

Group Refractive Index

at 850 nm

1.483

at 1300 nm

1.479

Backscatter Coefficient

at 850 nm

-68.4 dB

at 1300 nm

-75.8 dB

Macrobend Attenuation

100 turns @ 37.5 mm radius

850 nm 1300 nm

≤ 0.5 dB ≤ 0.5 dB

2 turns @ 15 mm radius

≤ 0.1 dB ≤ 0.3 dB

2 turns @ 7.5 mm radius

≤ 0.2 dB ≤ 0.5 dB

Environmental Characteristics

Operating Temperature Range	-60 °C to +85 °C
-----------------------------	------------------

Temperature Induced Attenuation at 850 nm and 1300 nm from -60° C to +85° C (5 24-hour cycles)	≤ 0.1 dB/km
--	-------------

Temperature and Humidity Induced Attenuation at 850 nm and 1300 nm from -10° C to +85° C, 94% RH (30 24-hour cycles)	≤ 0.1 dB/km
--	-------------

Accelerated Aging (Temperature) Induced Attenuation at 85° C for 30 days	≤ 0.1 dB/km
--	-------------

Water Immersion Induced Attenuation, 23° C for 30 days	≤ 0.1 dB/km
--	-------------

Damp Heat, 85° C, 85% Relative Humidity for 30 days	≤ 0.1 dB/km
---	-------------

Dynamic Fatigue Stress Corrosion Parameter typical (n_0)	≥ 20
--	------

Transmission Characteristics

Minimum Bandwidth Specifications (MHz-km)

EMB @ 850 nm	4700
EMB @ 953 nm	2470
EMB @ 1300 nm	500
Overfilled @ 850 nm	3500
Overfilled @ 953 nm	1850
Overfilled @ 1300 nm	500

Application Support

Application Support Examples Distance (Meters)¹

400 Gigabit Ethernet	
850-950 nm (400GBASE-SR4.2)	150
850 nm (400GBASE-SR8)	100
100 Gigabit Ethernet	
850 nm (100GBASE-SR10)	190 ²
850 nm (100GBASE-SR4)	100
850/910 nm (100 Gb/s BiDi)	150
850-950 nm (100 Gb/s SWDM4)	150
40 Gigabit Ethernet	
850 nm (40GBASE-SR4)	190 ²
850/910 nm (40Gb/s BiDi)	150
850-950 nm (40Gb/s SWDM4)	440
10 Gigabit Ethernet	
850 nm (10GBASE-S)	550 ³
1310 nm CWDM lasers (10GBASE-LX4)	300
1310 serial w/ EDC (10GBASE-LRM)	220
1 Gigabit Ethernet	
850 nm (1000BASE-SX)	1040
1310 nm (1000BASE-LX)	600

¹ Unless otherwise indicated, application support distances are based on standards based link loss. Lower-loss connectors and lower cable attenuations can lead to longer supportable distances. Contact OFS for specific cable attenuation and connection plus splice loss necessary to support a target distance.

² Distances assume maximum 1.0 dB total splice/connector loss, maximum 3.0 dB/km cable attenuation at 850 nm, and VCSEL spectral width of ≤ 0.45 nm. 150 meter reach over OM4 as defined by IEEE 802.3ba.


³ 550 meter reach assuming 3.5 dB/KM maximum cabled attenuation at 850 nm plus 1.0 dB of total connection and splice loss, or 3.0 dB maximum cabled attenuation at 850 nm and 1.3 dB total connection and splice loss. 400 meter reach as defined by IEEE 802.3ae.



A Furukawa Company

LaserWave® WideBand (OM5) Optical Fiber

OM5 multimode fiber optimized for short wavelength division multiplexing (SWDM) applications

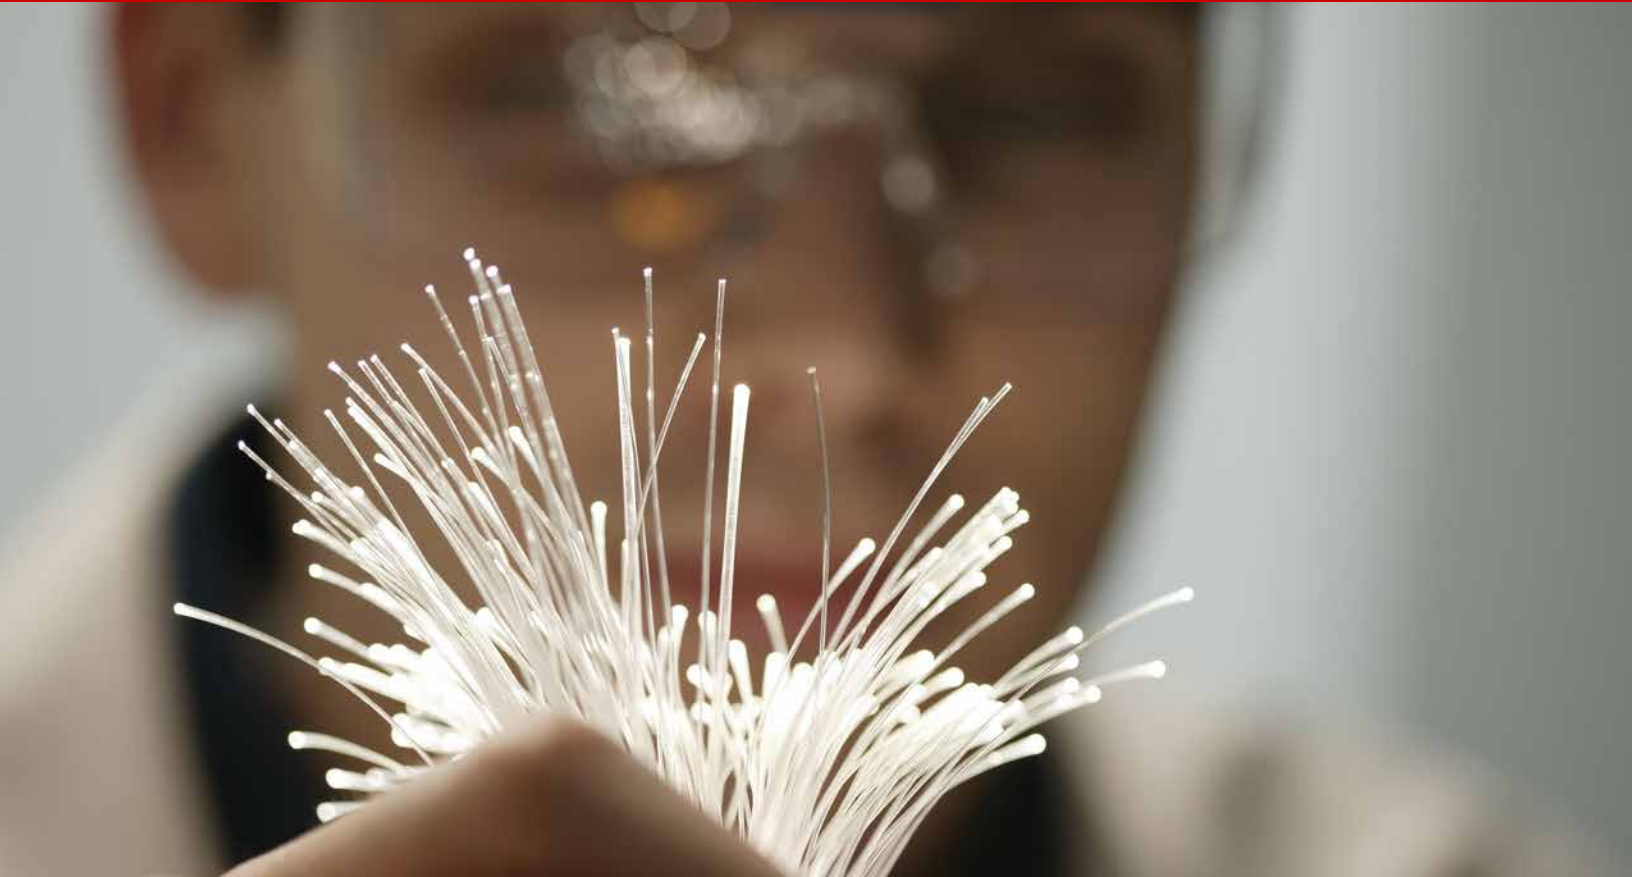

For additional information please contact your sales representative.
You can also visit our website at www.ofsoptics.com or call 1-888-fiberhelp (1-888-342-3743) USA or 1-770-798-5555 outside the USA.



Copyright © 2021 OFS Fitel, LLC.
All rights reserved, printed in USA.

OFS Marketing Communications
Doc ID: fiber-163 Date: 02/21



LaserWave is a registered trademark of OFS FITEL, LLC.
OFS reserves the right to make changes to the prices and product(s) described in this document at any time without notice. This document is for informational purposes only and is not intended to modify or supplement any OFS warranties or specifications relating to any of its products or services.