

# Loose Tube Fibre Optic Outdoor Cable

8 Element All Dielectric Dry Core Design


**MiDia® Micro GX**



FURUKAWA SOLUTIONS

Issue January 2024

according to OFS FURUKAWA SOLUTIONS Generic Specification

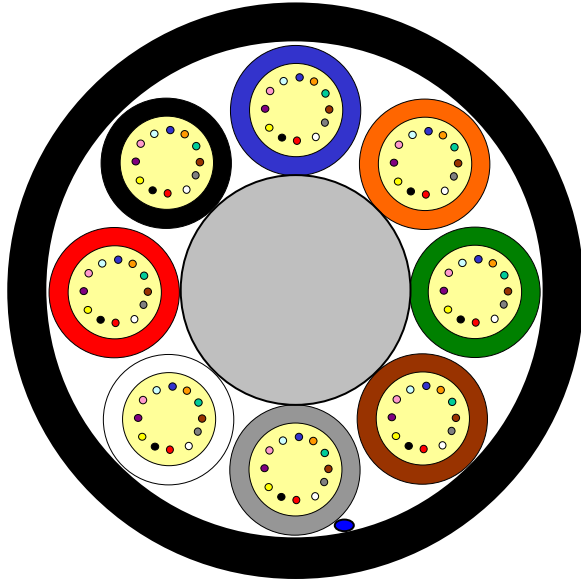

### Application

Air-Blown Installation into Micro Ducts  
 Recommended duct size for optimized blowing performance: 8, 10 and 12 mm Inner Diameter  
 Pushforce [N]: 350 in 8 mm ID-Duct

Other combinations are possible, please contact us for more information. Distance achievable depends on route, equipment and quality of duct.

### Design

- Optical Fibres
- Non-metallic Central Member
- Gel-filled Buffer Tubes
- Ripcord
- PE-Sheath

### Features

- Small tubes for a reduced outer diameter
- Dry Core Design – Cable core water blocked by means of dry “water swellable” technology - for quicker, cleaner cable prep for jointing

Version illustrated is the 96 Fibre Cable

Fibre Count	Tubes	Core Design	Outer Diameter [mm]	Cable Weight [kg/km]	AT-Code*
<b>12 Fibres per Tube</b>					
96	8	1+8	6.0	35	AT-[ ][ ][ ]453T-096

This table shows nominal diameter and weight values which may differ in shipments

\*Please refer to the OFS FURUKAWA SOLUTIONS AT- Code. The blanks specify the fibre type.

## Identification

Tube and Fibre Colour Code :

1	Blue	2	Orange	3	Green	4	Brown	5	Grey	6	White
7	Red	8	Black	9	Yellow	10	Violet	11	Rose	12	Aqua

Alternative tube and fibre colour code available on request.

### Sheath Marking:

OFS OPTICAL CABLE MIDIA MICRO GX [ID] [MM/YYYY] [Handset Sign] xxxF [Meter Marking]

Alternative sheath printing available on request.

# Loose Tube Fibre Optic Outdoor Cable

8 Element All Dielectric Dry Core Design



FURUKAWA  
SOLUTIONS

## MiDia® Micro GX

Issue January 2024

according to OFS FURUKAWA SOLUTIONS Generic Specification

### Mechanical Properties and Environmental Behaviour

Tests according to IEC 60794

	Parameter	Requirement	Value
<b>Tensile Performance:</b>  IEC 60794-1-21-E1A and E1B	Long term load	- No attenuation increase*	Load: 400 N
	Short term load, during installation	- No changes in attenuation before versus after load - Max. fibre strain 0.6%	Load: 1600 N
<b>Crush Performance:</b>  IEC 60794-1-21-E3A	Short term load	- No changes in attenuation before versus after load - No damage**	Load (Plate / Plate): 600 N
<b>Bending Performance</b>  IEC 60794-1-21-E11	Handling fixed installed	- No attenuation increase*	Bend radius: 100 mm
	During installation (under load)	- No changes in attenuation before versus after load	Bend radius: 200 mm
<b>Temperature Performance:</b>  IEC 60794-1-22-F1	Operation	Single-mode Fibres:	-40 to +70°C
	Installation	- No attenuation increase*	-15 to +40°C
	Storage/Shipping		-40 to +70°C
	Operation	Multimode Fibres:	-30 to +70°C
	Installation	- No attenuation increase***	-15 to +40°C
	Storage/Shipping		-40 to +70°C

\* No changes in attenuation means that any changes in measurement value, either positive or negative within the uncertainty of measurement shall be ignored. The total uncertainty of measurement shall be less than or equal to 0.05 dB or 0.05 dB/km.

\*\* Mechanical damage – when examined visually without magnification, there shall be no evidence of damage to the sheath. The imprint of plates will not be considered as damage.

\*\*\* No changes in attenuation means that any changes in measurement value, either positive or negative within the uncertainty of measurement shall be ignored. The maximal allowance for attenuation changes shall be less than or equal to +/- 0.2 dB/km for 90 % and +/- 0.3 dB/km for 100 % of the fibres

### Shipping Information

Cable Length	Drum Dimensions (approx.)		Shipping Weight (calc.)
	Diameter	Width	Cable + Drum
2000 m	1000 mm	780 mm	120 kg
4000 m	1000 mm	780 mm	190 kg
6000 m	1000 mm	780 mm	260 kg
8000 m	1200 mm	780 mm	341 kg

The shipping information are given for one-way reels. Reusable reels are available on request.

The information is believed to be accurate at time of issue.

OFS FURUKAWA SOLUTIONS reserves the right to improve, enhance and modify the features and specifications of OFS FURUKAWA SOLUTIONS products without prior notification.

Please ensure you have the latest version of the data sheet.

This data sheet is property of OFS FURUKAWA SOLUTIONS.

For additional information please contact your sales representative.

You can also visit our website at <http://www.ofsoptics.com>.

Email: [cableinfo@ofsoptics.com](mailto: cableinfo@ofsoptics.com)



MiDia is a registered trademark of OFS Fitel, LLC.