


2-Fiber Glass Armored 2.2 mm 200 μm LSZH Step-Index HCS[®] Fiber Optic Cable

P/N: C21063

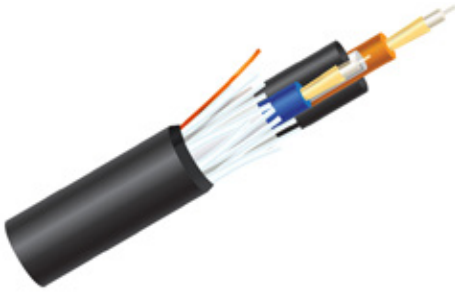

Overview

The OFS low smoke zero halogen (LSZH) 2.2 mm cables, based on HCS step-index multimode fiber, allow for a broader range of installation environments.

LSZH construction makes them suitable for indoor riser installations in enclosed or sealed locations. They are also sufficiently insulated to endure the transition areas from the indoors to the outdoors, such as at electrical substations, or poorly insulated semi-outdoor locations, such as wind turbine towers.

These cables are crimp and cleave compatible with V-Pin connectors. They are moisture and fatigue resistant and extremely durable. LSZH materials also offer a higher operating temperature range than comparable HCS cables.

Typical Applications

Nuclear Power Plants
Offshore Marine Platforms
Shipboard Systems
Wind Turbines

Product Specifications	
Product Description	2-Fiber Glass Armored 2.2 mm 200 μ m LSZH Step-Index HCS Fiber Optic Cable
Physical Characteristics	
Construction	2-Fiber Waterblocked Glass Armored
Fiber Core Diameter	200 \pm 4 μ m
Outer Cable Diameter	9.5 \pm 0.4 mm
Cable Weight	< 100 kg/km
Outer Jacket Material	LSZH
Outer Jacket Color	Black
Specialty Testing (IEC 754-2 Acid Gas - Halogen Content)	Passes
Specialty Testing (IEC 332-3 Flammability Rating)	Passes
Specialty Testing (Cyclic Flexing)	> 50,000 Cycles
Crimp & Cleave Compatibility	V-Pin Connectors
Optical Characteristics	
Type	Multimode Step-Index
Attenuation @ 850 nm	\leq 8 dB/km
Mechanical and Environmental	
Installation Load (Maximum)	400 lb. (1780 N)
Operating Load (Maximum)	200 lb. (890 N)
Minimum Bend Installation	143 mm
Minimum Bend Operating	95 mm
Operating Temperature	-20 to +80 °C
Storage Temperature	-40 to +80 °C
Intended Location	Indoor/Outdoor
Order by Part Number	C21063
Product Description Code	HCP-M0200T-V02ZB
OPTIONS: Also available in breakout construction with up to 18 sub-units, jacket color, outer jacket material, print legend, terminated assemblies	
NOTE: The operating temperature ranges are general guidelines. Consult with our Technical Sales department to determine the optimal coating and jacketing material for your specific application. 1.860.678.6636.	

For additional information please contact your sales representative.

You can also visit our website at www.ofsoptics.com or call 1-888-fiberhelp (1-888-342-3743) USA or 1-770-798-5555 outside the USA.



Copyright © 2019 OFS Fitel, LLC.
All rights reserved, printed in USA.

OFS Marketing Communications
Date: 12/19

HCS is a registered trademark of OFS Fitel, LLC. OFS reserves the right to make changes to the prices and product(s) described in this document at any time without notice. This document is for informational purposes only and is not intended to modify or supplement any OFS warranties or specifications relating to any of its products or services.